



**TECNOSERVICE'21 srl**

by Tinti Sergio  
Via Carlo Pisacane, 134  
61032 Fano (PU) Italy  
P.IVA IT0200411413

Tel. +39 0721 805911  
FAX +39 0721 809794  
e-mail: [staff@technochef.it](mailto:staff@technochef.it)  
[www.technochef.it](http://www.technochef.it)  
[www.technochef.eu](http://www.technochef.eu)

Services and Technologies for professional catering since 1973



#### TECHNICAL CARD

<b>power supply</b>	Monofase
<b>Volts</b>	V 230/1
<b>frequency (Hz)</b>	5060
<b>motor power capacity (Kw)</b>	1,8
<b>net weight (Kg)</b>	120
<b>breadth (mm)</b>	610
<b>depth (mm)</b>	600
<b>height (mm)</b>	560

#### PROFESSIONAL DESCRIPTION

**Automatic vacuum heat sealer for high performance countertop trays:**

- **made of stainless steel ;**
- **possibility of varying the temperature and welding time ;**
- **seals trays with maximum gastro-norm size 1/2 (325x260 mm) ;**
- **availability of moulds (not included) with 1 impression for 1/2 gastro-norm trays, with 2 impressions for 1/4 gastro-norm trays and with 4 impressions for 1/8 gastro-norm trays;**
- **automatic work cycle;**
- **self-opening tub lid ;**
- **LCD+sensor-VAC digital controls ;**
- **sensor in the chamber for detecting the percentage of vacuum and gas ;**
- **inert gas inlet provision;**
- **20 cubic meter/hour vacuum pump ;**
- **max press.: ±3 BAR;**
- **side support for transparent film reel ;**
- **manual film feed;**
- **ideal for the point of sale and for the laboratory.**
- **IMPORTANT: - to operate the machine requires an air compressor** with a minimum tank of 16/18 litres with an operating pressure of 1.5 atmospheres; - If, in the processing of products such as MEAT ... the use of gas mixtures rich in oxygen (percentage greater than 20% ) is required for packaging, it is **STRONGLY RECOMMENDED** to use an **EXPLOSION-PROOF vacuum pump** for safety




reasons, - available as an optional upon request.


**OPTIONAL - ACCESSORIES :**

- 1-impression aluminum **mold** ;
- 2-cavity aluminum **mold** ;
- 4-cavity aluminum **mold** ;
- Air/gas inlet **regulation pressure gauge** ;


**CE MARK**  
**MADE IN ITALY**

CODE	DESCRIPTION	PRICE/DELIVERY
<b>EM-TRAY600</b>	Vacuum/gas heat sealer, for PREFORMED TRAYS, AUTOMATIC COUNTERTOP with DIGITAL CONTROLS, for CONTAINERS MAXIMUM SIZE of mm 265x325, V 230/1, Kw 1.8, Weight 120 Kg, external dimensions mm 610x600x560h	<b>€ 4.919,81</b> <i>VAT excluded</i> <b>Shipping to be calculated</b> <b>Delivery</b> from 4 to 9 days

TECHNICAL CARD		
CODE/PICTURES	DESCRIPTION	PRICE/DELIVERY
<b>EM-TRAYGN1/2</b> 	<b>TECHNOCHEF - Anticorodal aluminum mold, Mod.GN1/2</b>	<b>€ 303,05</b> <i>VAT excluded</i> <b>Shipping to be calculated</b> <b>Delivery</b> from 4 to 9 days
<b>EM-TRAYGN1/4</b> 	<b>TECHNOCHEF - Anticorodal aluminum mold, Mod.GN1/4</b>	<b>€ 334,20</b> <i>VAT excluded</i> <b>Shipping to be calculated</b> <b>Delivery</b> from 4 to 9 days
<b>EM-TRAYGN1/8</b> 	<b>TECHNOCHEF - Anticorodal aluminum mold, Mod.GN1/8</b>	<b>€ 368,19</b> <i>VAT excluded</i> <b>Shipping to be calculated</b> <b>Delivery</b> from 4 to 9 days

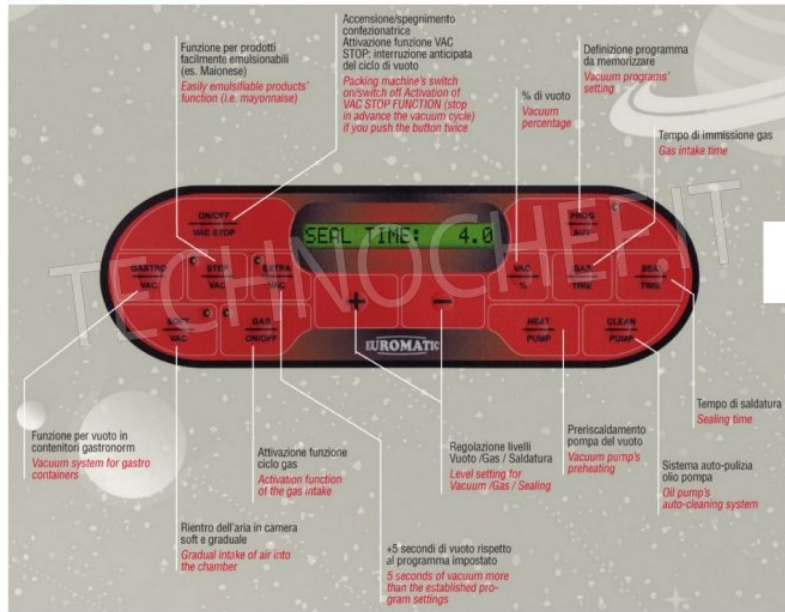

Fustellatura manuale  
delle vaschette  
*Manual trays cutting*



STAMPO GN 1/2 mm 265x320  
MOULD GN 1/2 mm 265x320



STAMPO GN 1/4 mm 265x160  
MOULD GN 1/4 mm 265x160



STAMPO GN 1/8 mm 160x130  
MOULD GN 1/8 mm 160x130