



TECNOSERVICE'21 srl

by Tinti Sergio
Via Carlo Pisacane, 134
61032 Fano (PU) Italy
P.IVA IT0200411413

Tel. +39 0721 805911
FAX +39 0721 809794
e-mail: staff@technochef.it
www.technochef.it
www.technochef.eu

Services and Technologies for professional catering since 1973



TECHNICAL CARD

| | |
|----------------------------------|----------|
| power supply | Monofase |
| Volts | V 230/1 |
| frequency (Hz) | 50 |
| motor power capacity (Kw) | 1,8 |
| breadth (mm) | 610 |
| depth (mm) | 600 |
| height (mm) | 1100 |

PROFESSIONAL DESCRIPTION

Automatic vacuum heat sealer for trays, performed on a trolley :




- made of **stainless steel** ;
- **possibility of varying the temperature and welding time** ;
- seals **trays with maximum gastro-norm size 1/2 (325x260 mm)** ;
- **availability of moulds (not included)** with **1 impression** for 1/2 gastro-norm trays, with **2 impressions** for 1/4 gastro-norm trays and with **4 impressions** for 1/8 gastro-norm trays;
- **LCD+sensor-VAC digital controls** ;
- automatic work cycle;
- **self-opening** tub lid;
- **vacuum sensor** ;
- provision for inert gas inlet;
- **40 cubic meter/hour vacuum pump** ;
- max press.: ± 3 BAR;
- side support for **transparent film reel** ;
- **manual** film feed.
- **IMPORTANT: - to operate the machine requires an air compressor** with a minimum tank of 16/18 litres with an operating pressure of 1.5 atmospheres; - if the **packaging of products such as MEAT ... requires the use of gas mixtures rich in oxygen** (percentage **greater than 20%**) for packaging, it is **STRONGLY RECOMMENDED** to use an **EXPLOSION-PROOF vacuum pump** for safety reasons, - available as an optional upon request.


OPTIONAL - ACCESSORIES

- 1-impression aluminum **mold** ;
- 2-cavity aluminum **mold** ;
- 4-cavity aluminum **mold** ;
- Air/gas inlet **regulation pressure gauge** ;

CE MARK
MADE IN ITALY

| CODE | DESCRIPTION | PRICE/DELIVERY |
|------------|--|--|
| EM-TRAY800 | Vacuum/gas heat sealer, for PREFORMED TRAYS, AUTOMATIC on TROLLEY CABINET, digital controls, for CONTAINERS MAXIMUM SIZE of mm 265x325, V 230/1, Kw 1.8, Weight 180 Kg, external dimensions mm 610x600x1100h | € 5.194,54 <i>VAT excluded</i> Shipping to be calculated Delivery from 4 to 9 days |

| TECHNICAL CARD | | |
|--|--|--|
| CODE/PICTURES | DESCRIPTION | PRICE/DELIVERY |
| EM-TRAYGN1/2  | TECHNOCHEF - Anticorodal aluminum mold, Mod.GN1/2 | € 303,05 <i>VAT excluded</i> Shipping to be calculated Delivery from 4 to 9 days |
| EM-TRAYGN1/4  | TECHNOCHEF - Anticorodal aluminum mold, Mod.GN1/4 | € 334,20 <i>VAT excluded</i> Shipping to be calculated Delivery from 4 to 9 days |
| EM-TRAYGN1/8  | TECHNOCHEF - Anticorodal aluminum mold, Mod.GN1/8 | € 368,19 <i>VAT excluded</i> Shipping to be calculated Delivery from 4 to 9 days |

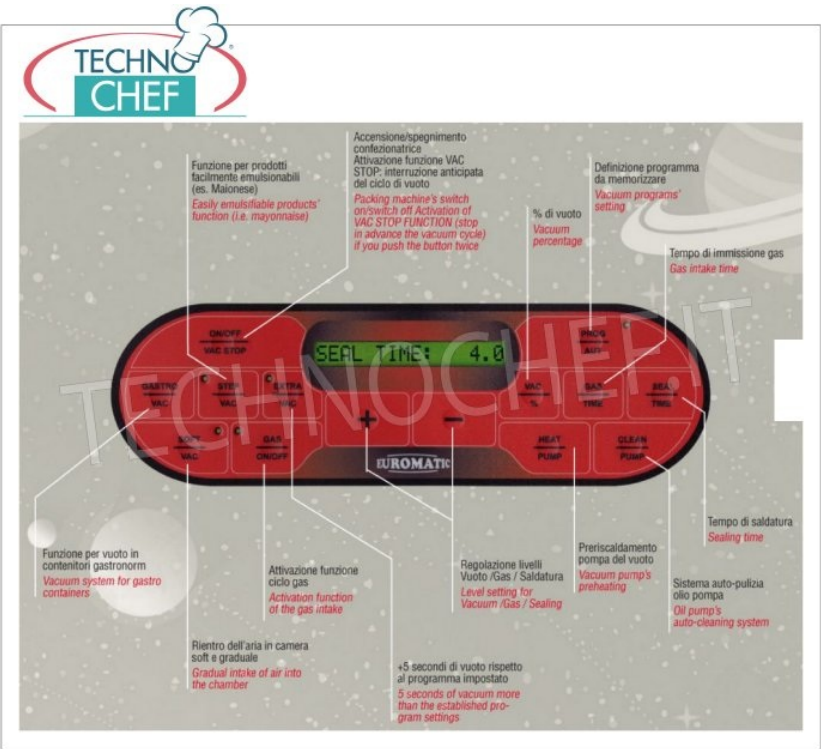




Saldatura a mezzo pistone
pneumatico 3 ATA
Sealing by pneumatic piston, 3 Ata



Fustellatura manuale
delle vaschette
Manual trays cutting



STAMPO GN 1/2 mm 265x320
MOULD GN 1/2 mm 265x320



STAMPO GN 1/4 mm 265x160
MOULD GN 1/4 mm 265x160



STAMPO GN 1/8 mm 160x130
MOULD GN 1/8 mm 160x130