



TECHNICAL CARD

power supply	Monofase
Volts	V 230/1
frequency (Hz)	50
motor power capacity (Kw)	1,62
net weight (Kg)	370
breadth (mm)	2050
depth (mm)	620
height (mm)	1860

PROFESSIONAL DESCRIPTION

REFRIGERATED PASTRY SHOWCASE 3 DOORS, CURVE Line, with 4 DISPLAY SIDES, 10 RECTANGULAR SHELVES + 6 ROTATING SHELVES, capacity 1388 litres, temperature +4°/+10°C:

- **external structure in silver anodized aluminium ;**
- showcase built using **insulating double glazing** , compliant with EN UNI 1279;
- **exposure on 4 sides ;**
- **10 rectangular glass shelves measuring 565x420 mm + 6 rotating glass shelves Ø 452 ;**
- **capacity 1388 litres ;**
- **operating temperature +4°/+10°C ;**
- **“sensitive touch” control panel** with a unique and exclusive design, the result of a long IT and design study;
- **ventilated refrigeration ;**
- **automatic defrost ;**
- **LED lighting** as standard on both sides of the internal compartment;
- lumen/meter: 2 x 1200 lm;
- humidity: 75%;
- **compressors and the touch screen thermostat** are of **the latest generation, guaranteeing high efficiency and low absorption** , with notable advantages for operating economy;
- **accuracy , solidity and technology** are the prerogatives on which the CURVE line is based, an expression of solidity combined with practicality, capable of satisfying all types of use, where robustness and reliability come together in the name of tradition.









Accessories/Options :



- locking with key

- glass shelf
- support kit for glass and grilles
- suction cup kit
- adjustable feet kit
- mirror glass
- additional LED
- wooden crate packaging
- finishes and colours: RAL of your choice

CE mark
Made in Italy

CODE	DESCRIPTION	PRICE/DELIVERY
SL-CPS1300V/R/V	Refrigerated pastry display case with 3 doors, CURVE line, 4 display sides, 10 rectangular shelves + 6 rotating shelves, capacity 1388 litres, temperature +4°/+10°C, ventilated refrigeration, V.230/1, Kw.0, 54+0.54+0.54, weight 370 kg, dim.mm.2050x620x1860h	

TECHNICAL CARD		
CODE/PICTURES	DESCRIPTION	PRICE/DELIVERY
SL-KV 	Suction Cups Kit	
SL-KSVG 	Support kit for glass and grids	
SL-RPV45/90/130 	Glass shelf	
SL-LED 	Additional Led	
SL-KP1300 	Adjustable Feet Kit	
SL-CC1300 	Key closure	
SL-VSP1300 	Mirror glass	
SL-IMLEG1300 	Wooden case packing	
SL-RAL/1300 	Finish and Colors	

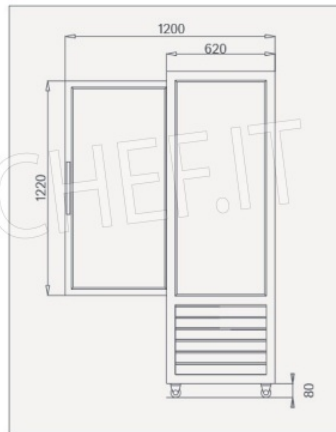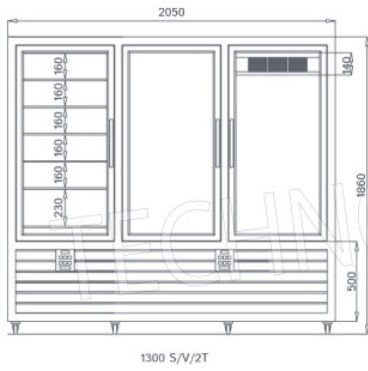

VISTA LATERALE
Side view / Seitenansicht / Vue latérale