



TECNOSERVICE'21 srl

by Tinti Sergio
Via Carlo Pisacane, 134
61032 Fano (PU) Italy
P.IVA IT0200411413

Tel. +39 0721 805911
FAX +39 0721 809794
e-mail: staff@technochef.it
www.technochef.it
www.technochef.eu

Services and Technologies for professional catering since 1973



TECHNICAL CARD

| | |
|----------------------------------|---------|
| power supply | Trifase |
| Volts | V 400/3 |
| frequency (Hz) | 50 |
| motor power capacity (Kw) | 0,75 |
| net weight (Kg) | 157 |
| gross weight (Kg) | 162 |
| breadth (mm) | 2800 |
| depth (mm) | 880 |
| height (mm) | 1100 |

PROFESSIONAL DESCRIPTION

Professional floor-standing PASTRY SHEETER, with 1200x500 mm BELTS-BELTS with UNDER-TABLE for FLOUR COLLECTION and PASTRY COLLECTION, Roller opening from: 0 to 35 mm, 1200 mm long folding TABLES:

- Designed and engineered to ensure **extremely easy and functional use** , in full compliance with international safety standards;
- **Reliable, solid and efficient structure** , it meets the needs of restaurants, hotels, pastry shops and small and medium-sized bakeries;
- **Shoulder in cast aluminum** to ensure maximum vibration absorption and therefore reduce noise;
- **Maximum product visibility** thanks to stainless steel wire guards and shoulder structure;
- **Motorized, extractable and liftable shelves** to reduce space when not in use;
- **Electrical system** with variable speed as standard;
- **Toothed sector** to increase precision on thin thicknesses;
- **Reverse buttons** ;
- **Machine complete with double control** (buttons and pedal) **as standard** ;
- **Precise and constant thickness adjustment** ;
- **Easily removable scrapers** for daily cleaning at the end of service;
- **Rolling pin holder in cast aluminum** ;
- **Flour collecting trays as standard** ;
- **Safety guards in grid** to increase visibility of the rolled product;
- **Swivel wheels and external stabilizing feet** and fixing to the ground to facilitate movement;
-



- **Possibility of working any type of pasta** , up to very thin thicknesses;
- **Micrometric adjustment** of cylinder opening with aluminium handle;
- **cylinder diameter: Ø 7 cm;**
- **cylinder opening: from 0 to 3.5 cm;**
- **cylinder length: 50 cm;**
- **Scrape the paste on the easily removable cylinders** , for **easy and effective cleaning**;
-
- **Movement of the BELTS-CARPETS** via **pedal control** ;
- **Variable speed conveyor belts to avoid wrinkles in the dough** ;
- **Shielded bearings** to prevent flour infiltration;
- **Tables that fold upwards** to save space when the machine is at rest;
- **Non-removable table system** with under-top **for collecting FLOUR and stainless steel pasta collector** ;
- Mounted on wheels for easy movement;
-
- **Working dimensions** : mm 2760 x 915 x 1160h;
- **Dimensions at rest** : mm 890 x 915 x 1920h;
-
- **Low voltage electrical system** with dual control (manual and pedal);
- **Accident prevention type guards** , connected to the electrical system by means of limit switches;


Optional:

- Also available with single-phase motor

CE MARK
MADE in Italy

| CODE | DESCRIPTION | PRICE/DELIVERY |
|--------------------------|--|--|
| TCF133-SF-500-120 | Professional Pastry Sheeter with BELTS-BELTS mm 1200x500 equipped with FLOUR UNDERBED and PASTRY COLLECTOR, LAMINATION rollers mm. 500 adjustable from: 0 to 35 mm, Weight Kg 194, kw 0.75, open dimensions mm. 2760x915x1160h | € 4.874,99 <i>VAT excluded</i> <i>Shipping to be calculated</i> Delivery from 4 to 9 days |

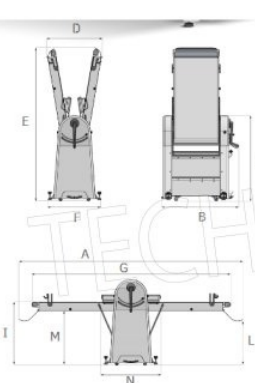

| Modello | SF 500/710 | SF 500/950 | SF 500/1200 |
|----------------------------|------------|------------|-------------|
| Lunghezza cilindri (mm) | 500 | 500 | 500 |
| Diametro cilindri (mm) | 70 | 70 | 70 |
| Max apertura cilindri (mm) | 35 | 35 | 35 |
| Lunghezza piani (mm) | 710 | 950 | 1200 |
| Potenza (kW) | 0,75 | 0,75 | 0,75 |
| Peso (kg) | 180 | 187 | 194 |
| A (mm) | 1820 | 2350 | 2760 |
| B (mm) | 915 | 915 | 915 |
| C (mm) | 1160 | 1160 | 1160 |
| D (mm) | 650 | 790 | 890 |
| E (mm) | 1470 | 1730 | 1940 |
| F (mm) | 695 | 695 | 695 |
| G (mm) | 1480 | 2015 | 2460 |
| I (mm) | 850 | 850 | 850 |
| L (mm) | 620 | 620 | 620 |
| M (mm) | 735 | 735 | 735 |
| N (mm) | 800 | 800 | 800 |

NEW



Spalla sempre in fusione di alluminio per ridurre la rumorosità da vibrazione

Massima visibilità del prodotto grazie a ripari in filo inox e struttura della spalla

NEW



Piani rimovibili di serie sia per SF500 che per SF600

NEW



Impianto elettrico con velocità variabile di serie

NEW



Ruote piroettanti e piedini stabilizzatori esterni e per facilitare la movimentazione il fissaggio a terra

NEW



Settore dentato per aumentare la precisione su spessori sottili

NEW



Pulsanti di inversione marcia

NEW



Macchina completa di doppio comando (pulsanti e pedale) di serie

NEW



Sgancio rapido per pulizia raschiatori e possibilità di regolazione

NEW



Porta mattarello in fusione di alluminio