



#### PROFESSIONAL DESCRIPTION

##### Modular prefabricated REFRIGERATOR for temperature -2° +8°C :

- made with **modular sandwich panels** , 70 mm thick, in **non-toxic white pre-painted sheet metal** , insulated with **high density polyurethane** , 40-42 kg/cubic meters (95% closed cells)
- **Panel locking** using eccentric hooks;
- **revolving door with clear light to choose from the following sizes: 600x1850 mm, 700x1850 mm, 800x1850 mm, 900x1850 mm;**
- **easily adjustable door hinges** in 3 directions;
- **handle with lock and safety release from the inside** in phosphorescent material;
- PED **pedestrian flooring** made of **non-slip AISI 304 stainless steel sheet**, STATIC LOAD CAPACITY 1500 Kg/m<sup>2</sup>, POINT LOAD CAPACITY 100 Kg;
- **rounded internal corners** for **maximum hygiene** and **ease of cleaning**,
- prepared for a monoblock **refrigeration unit overlapped on the wall** ,
- on request it is possible to install **ceiling- mounted monoblock units** or **refrigeration units with remote group** ,
- **supplied disassembled and packed on pallets** (on request on wooden crate),
- 
- **INTERNAL DIMENSIONS** : mm 2000x2800x2000h.
- **net capacity: 11.20 cubic meters**,
- **EXTERNAL DIMENSIONS:** mm 2140x2940x2140h

##### Accessories:

- **Internal shelving made of 20 micron anodized aluminum** with 3 rows of grilled shelves.
- **Crawl space for floor ventilation** made of plastic profile.
- **Door curtain made of transparent plastic strips.**
- **Door microswitch and internal light** .

##### Optional on request:

- **Driveable and reinforced floor**
- **Ceiling refrigeration units**
- **Split refrigeration systems ( remote )**

- Possibility of measures other than those proposed.

**MONOBLOCK REFRIGERATION UNIT (Not Included) , for Temp. - 2° + 8° C. for OVERLAPPED WALL mounting, V. 400/3+N - Kw 1.8 -- mod. TCF313-L11130N3**

- External bodywork of the monoblock in **galvanized sheet metal**;
- evaporator part frame in magnesium aluminum;
- **Max operating ambient temperature +32°C**
- ECOLOGICAL REFRIGERANT **GAS R452a**
- **hermetic compressor**;
- self-resetting high and low pressure switch,
- **automatic hot gas defrosting**,
- **cable** for connecting **the door micro and door light** ,
- **digital telethermometer display** with temperature indication and operating status display: cold-defrosting-evaporator fans-alarm in progress.
- **Temp. Adjustable from: -2° +8° C. ,**
- **possibility of displaying alarms such as:** high and low temperature and pressure, open door, condensation, dirt, etc.
- provision for connection to the frigotel supervisor

**CE mark**  
**Made in ITALY**

**AVAILABLE MODELS**

**TCF474-TN20-28/S7**



**Prefabricated cold storage room suitable for normal temperatures (-2°+8°), made of modular sandwich panels, 70 mm thick, with revolving door and floor, 11.20 cubic meters, external dimensions, mm. 2140x2940x2140h**

**€ 2.462,80**

*VAT excluded*  
**Shipping to be calculated**

**Delivery** from 15 to 25 days

**TCF474-L11130N3**



**Wall-mounted monoblock refrigeration unit TN, tropicalized, for normal temperature -2°+8° ventilated, with ecological gas R404a, V 400/3+N, Kw 1.8, weight Kg 85, external dimensions mm 1035x735x1040h**

**€ 2.662,78**

*VAT excluded*  
**Shipping to be calculated**

**Delivery** from 15 to 25 days

**TECHNICAL CARD**

**CODE/PICTURES**

**TCF474-ILLUMINAZIONE**



**DESCRIPTION**

**Door microswitch and internal light**

**PRICE/DELIVERY**


**€ 87,12**

*VAT excluded*  
**Shipping to be calculated**

**Delivery** from 4 to 9 days




PAVIMENTO + PANNELLO: MONTAGGIO SEMPLICE E VELOCE  
TRAMITE FISSAGGIO CON AGGANCIO ECCENTRICO.

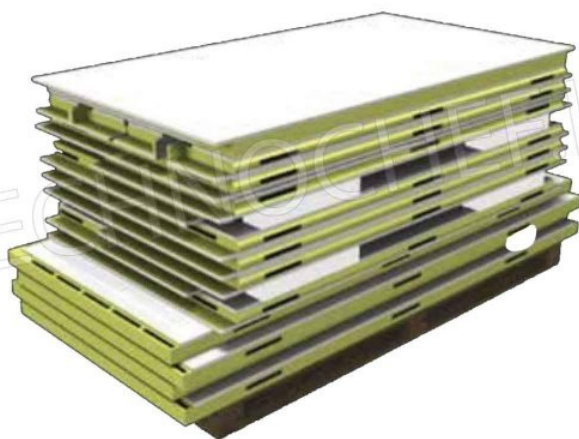

FORNITA SMONTATA E IMBALLATA SU PALLET



SEQUENZA DI MONTAGGIO PANNELLI

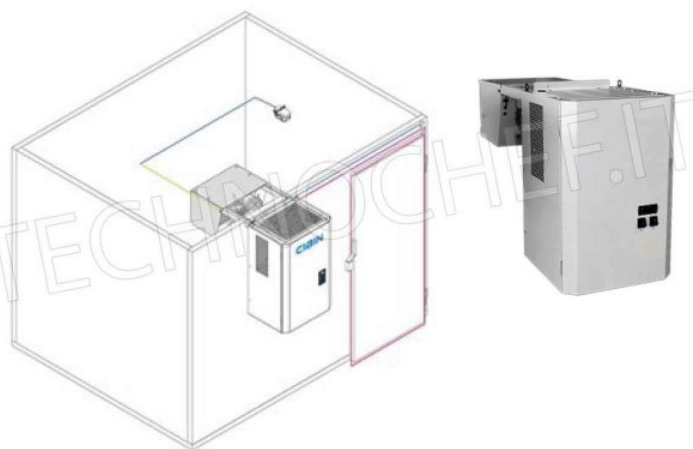




SU RICHIESTA: CELLA SENZA PAVIMENTO



CERNIERE FACILMENTE REGOLABILI IN UTENZA IN 3 DIREZIONI



MANIGLIA STANDARD CON SERRATURA, CHIAVE A SBLOCCO INTERNO DI SICUREZZA

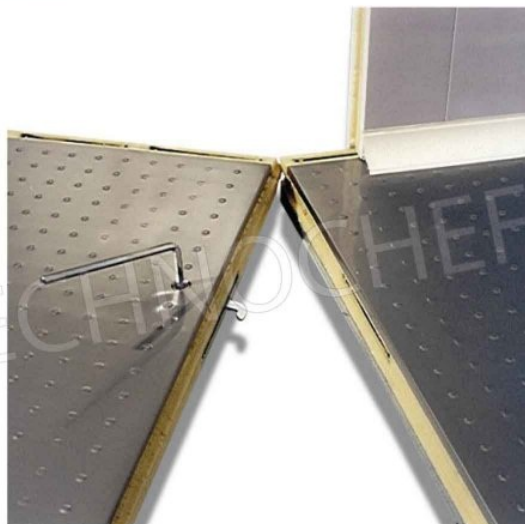

PAVIMENTO STANDARD (NON CARRELLABILE) IN ACCIAIO INOX  
ANTISDRUCCIOLO, CON SUPPORTO INTERNO INTEGRATO.