

TECNOSERVICE'21 srl

by Tinti Sergio Via Carlo Pisacane, 134 61032 Fano (PU) Italy P.IVA IT0200411413 Tel. +39 0721 805911 FAX +39 0721 809794 e-mail: staff@technochef.it www.technochef.it www.technochef.eu

Services and Technologies for professional catering since 1973



TECHNICAL CARD	
power supply	Monofase
Volts	V 230/1
frequency (Hz)	50
motor power capacity (Kw)	0,42
net weight (Kg)	66
breadth (mm)	860
depth (mm)	530
height (mm)	900

PROFESSIONAL DESCRIPTION

CELLAR-CASES for WINE, Capacity 42 Tilted Bottles, STATIC or VENTILATED REFRIGERATION, suitable for WHITE or RED WINES:

- aluminum structure .
- o interior in Aluminium,
- $\circ\;$ sliding doors, sides and top in double glazing ,
- ECOLGICO refrigeration unit with GAS R 600a,
- digital thermoregulator from: +4°+16°C ,
- automatic defrost , automatic condensation evaporation,
- innovative refrigeration system based on the positioning of the cooling coil in the center of the display case which guarantees better conservation conditions ,
- \circ SLIDING glass DOORS on 1 SIDE ,
- anti-fog system doors;
- $\circ~$ natural white LED~lighting on the pillars,
- key lock,
- $\circ \ \ \text{anti-vibration system} \ ,$
- $\circ~$ Ambient Temperature: +25°, MAX for WHITE WINES
- Ambient Temperature: +30°, MAX for RED WINES

4 POSSIBILITIES OF USE CONFIGURABLE by the Customer

- STATIC MULTI-TEMPERATURE from +4° to +16°C for WHITE and RED wines,
- STATIC MULTI-TEMPERATURE from +14° to +20°C for RED wines,
 VENTILATED for RED Wines with adjustable temperature from +14° to + 16°C,
- VENTILATED for WHITE wines with adjustable temperature from +4° to +6°C;

Possibility of EQUIPMENTS, to be selected at the TIME of the Order within the PRODUCT SHEET.

- FRAME in RAW MDF, - MATT WHITE RAL-9010, - MATT BLACK RAL-9005, - GOLD VO1, SILVER VO2, - RAL 20 COLORS MATT LACQUERED, RAL 100 COLORS GLOSS LACQUERED

OPTIONAL/ACCESSORIES:

 $\circ~$ Colored LED lighting on the uprights with remote control

CE mark Made in Italy

AVAILABLE MODELS

EO-TV-M22-M01



WINE CASE, 42 Bottles, Doors on 1 Front, 3 Glass Sides, Version with RAW MDF WOOD FRAME

€ 3.963,18 VAT escluded Shipping to be calculed

Delivery from 10 to 18 days

EO-TV-M22-RAL9010



CASE for WINE, 42 Bottles, Doors on 1 Front, 3 Glass Sides, Version with WOODEN FRAME in MATT WHITE color

€ 3.997,06 VAT escluded

Shipping to be calculed Delivery from 10 to 18 days

EO-TV-M22-RAL9005



CASE for WINE, 42 Bottles, Doors on 1 Front, 3 Glass Sides, Version with WOODEN FRAME in MATT BLACK color

€ 3.997,06 VAT escluded Shipping to be calculed

Delivery from 10 to 18 days

EO-TV-M22-V01



CASE for WINE, 42 Bottles, Doors on 1 Front, 3 Glass Sides, Version with GOLD painted WOODEN **FRAME**

€ 4.335,79

VAT escluded Shipping to be calculed

Delivery from 10 to 18 days

EO-TV-M22-V02



CASE for WINE, 42 Bottles, Doors on 1 Front, 3 Glass Sides, Version with SILVER painted **WOODEN FRAME**

€ 4.335,79 VAT escluded Shipping to be calculed

Delivery from 10 to 18 days

EO-TV-M22-RAL20



CASE for WINE, 42 Bottles, Doors on 1 Front, 3 Glass Sides, Version with WOODEN FRAME in RAL20 colors

€ 4.335,79

VAT escluded Shipping to be calculed

Delivery from 10 to 18 days

EO-TV-M22-RAL100



WINE CASE, 42 Bottles, Doors on 1 Front, 3 Glass Sides, Version with WOODEN FRAME in RAL100 colors

€ 4.335,79

VAT escluded

Shipping to be calculed

Delivery from 10 to 18 days

TECHNICAL CARD

CODE/PICTURES

DESCRIPTION

PRICE/DELIVERY

EO-OPT-RGB-D


Colored LED lighting with remote control

€ 153,55

VAT escluded

Shipping to be calculed

Delivery from 4 to 9 days

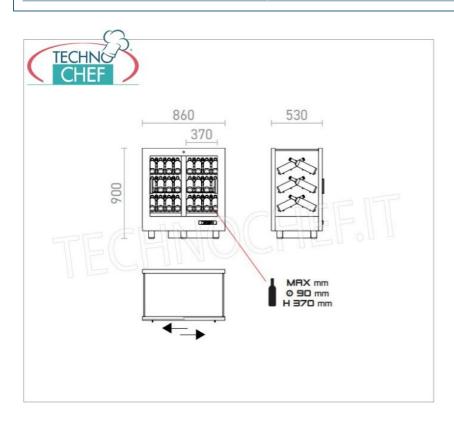







UNITÀ REFRIGERANTE INTEGRATA • SELF-CONTAINED REFRIGERATING UNIT • UNITÉ RÉFRIGÉRANTE INTÉGRÉE

IMPIANTO A REFRIGERAZIONE CENTRALE (brevettato) - CENTRAL COOLING SYSTEM (patented) - INSTALLATION DE RÉFRIGÉRATION CENTRALE (brevetée)

STANDARD



La serpentina di raffreddamento
e le ventole di aereazione interna
fans are installed in the middle
of the cabinet inside the aluminium
roizzontale con ventola a pala paremente e la vasca per l'evaporazione
della condensa Sono inseriti in una
speciale vasca ribassata. Con questa
soluzione, pur installando un compressore standard, l'altezza della base
el limitata (150 mm), a la circolazione
del limitata (150 mm) in quanto viene
utilizzato lo spazio inferiore dove sono
inseriti i piedi (40 mm). La circolazione
del aria de condensazione avviene
dalla parte inferiore frontale.





circolazione aria interna · inside air flow · circulation de l'air interne aspirazione aria ambiente - cold air suction - aspiration de l'air ambient espulsione aria calda - warm air outlet - expulsion de l'air chaud

ouwet · expulsion de l'air cha



IMPOSTAZIONE TERMOREGOLATORE • TEMPERATURE CONTROLLER SETTING • RÉGLAGE CONTROLEUR DE TEMPÉRATURE



 $\textbf{SET} \ \ \text{Per visualizzare/modificare Set point} \cdot \textit{View/change the set point} \cdot \textit{Pour afficher/changer le point de consigne}$

Per avviare sbrinamento manuale • Start the manual defrost cycle • Pour lancer le dégivrage manuel
Per diminuire la temperatura • Decrease the temperature • Pour diminuer la témpérature

▲ Per aumentare la temperatura · Raise temperature · Pour augmenter la témpérature

RUX Per attivare resistenza guide · Switch on rails heating · Pour activer le rechauffage du cadre des rails

Per attivare ventole interne · Switch on inside fans · Pour activer les ventilateurs interieurs

