

TECNOSERVICE'21 srl by Tinti Sergio Via Carlo Pisacane, 134 61032 Fano (PU) Italy P.IVA IT0200411413 Tel. +39 0721 805911 FAX +39 0721 809794 e-mail: staff@technochef.it www.technochef.it www.technochef.eu

Services and Technologies for professional catering since 1973



TECHNICAL CARD

power supply	Monofase
Volts	V 230/1
frequency (Hz)	50
motor power capacity (Kw)	0,33
net weight (Kg)	30
gross weight (Kg)	35
breadth (mm)	365
depth (mm)	520
height (mm)	600

PROFESSIONAL DESCRIPTION

FULL ICE CUBES MAKER, Yield 25 kg/24 hours, 6 kg internal storage, available with air or water cooled refrigeration unit:


- High-density, crystalline, and pure solid ice cube. Suitable for prolonged cooling of any beverage (without diluting it) in any situation. The ice cubes are formed by sprinkling water onto a horizontal copper evaporator, which, as it cools, forms pure, crystalline, high-density ice cubes. The solid ice cube, purer than the water it is made from, is ideal for prolonged cooling of any beverage, without diluting it, in any situation.
- Stainless steel body ;
- $\circ~$ Front ventilation , ideal for built-in installation;
- Electronic control with self-diagnosis;
- Easy maintenance;
- Expanded polyurethane insulation (HCFC-free) to preserve ice quality;
- Easily removable front condensation filter;
- Lower water consumption;
- Energy saving;
- Tropical class +43°C.

TECHNICAL DATA :


- Dimensions (WxDxH): 365x520x600 mm
- Production in 24h (21°C 15°C): 25 Kg
- Storage capacity: 6 kg

- Production per cycle: 28 ice cubes
- Ice type: 18g full cube
- $\circ~$ Cooling system: Air / Water
- Refrigerant type: R 290
- Standard voltage: 230 V~ 50 Hz
- Power consumption: 330 W
- Cube dimensions (LxH): 33x30 mm
- Feet: + 0÷20 mm
- Net weight: 30 kg
- Gross weight: 35 kg

CE MARK MADE IN ITALY

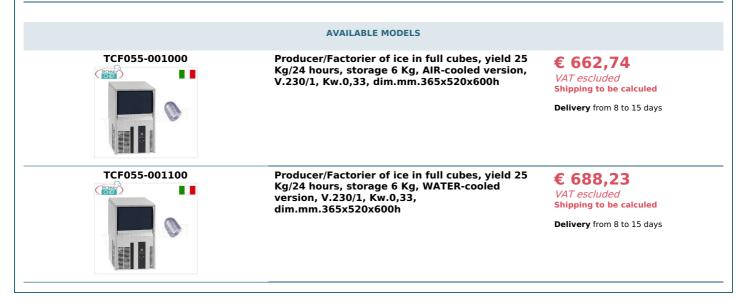



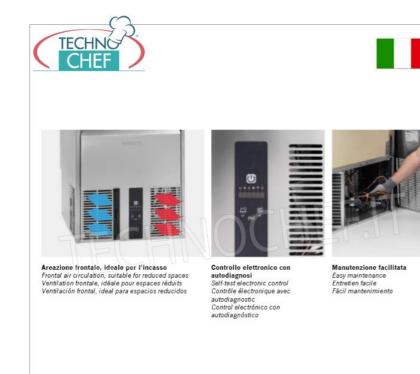





Isolamento in poliuretano espanso (HCFC-free) per preservare la qualità del ghiaccio Injected polyurethane foam insulation (HCFC-free) to preserve ice quality Isolation en polyuréthane expansé (HCFC-free) à haute isolation pour une meilleure conservation et qualité des glaçons Aislamiento con espuma de poliuretano (HCFC-free) para preservar la calidad del hielo



Carrozzeria in acciao inox Stainless steel body Carrosserie en acier inox Carroseria en acero inoxidable

Filtro frontale di condensazione facilmente estraibile Easily removable front condensation filter Filtre frontal à poussière, facile à enlever Filtro antipolvo frontal, fácilmente extraíble



