


TECNOSERVICE'21 srl by Tinti Sergio Via Carlo Pisacane, 134 61032 Fano (PU) Italy P.IVA IT0200411413 Tel. +39 0721 805911 FAX +39 0721 809794 e-mail: staff@technochef.it www.technochef.it www.technochef.eu

Services and Technologies for professional catering since 1973

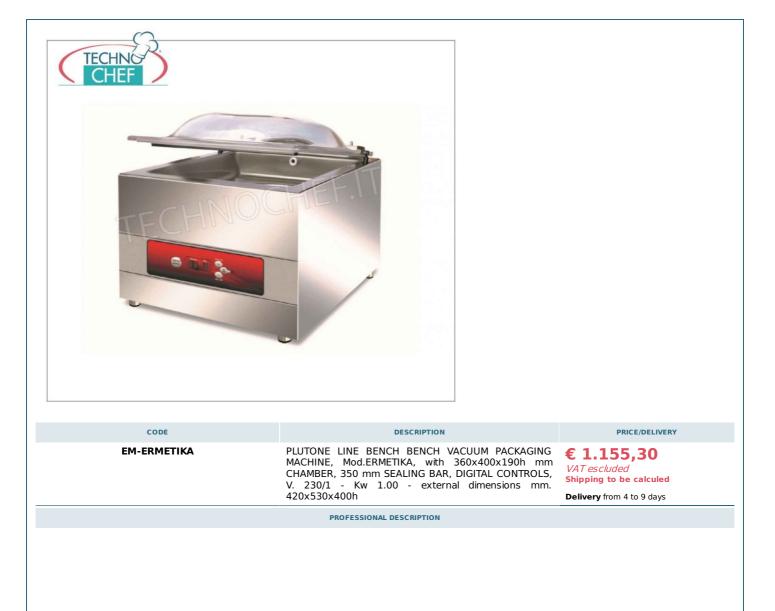

BENCH COUNTER VACUUM PACKAGING MACHINE PLUTO Line, Mod.ERMETIKA, CE standards :

- VACUUM CHAMBER 360x400x190h mm , made of stainless steel molded in a single piece with rounded corners for maximum hygiene and ease of cleaning ,
- 350 mm SEALING BAR , fully removable wiring;
- $\circ~$ single-program DIGITAL CONTROL panel with manually activated timed vacuum percentage ,
- VACUUM PUMP of 10 metres / cubic meters / hour ;
- Filling platforms series;
- Transparent tank lid with automatic piston lifting at the end of the work cycle ;
- 1 work program that can be modified and stored thanks to the control panel;
- Pump self-cleaning system for removing water and humidity;
- Optimal times and reduced maintenance costs;
- GASTROVAC function for creating external vacuum in GN containers;
- EXTRAVAC function which offers a second vacuum phase of 5 seconds (suitable for minced and boned meat);
- **Emergency button** for blocking the appliance + rapid welding;
- Carter with 90° opening to facilitate access to the inside of the packaging machine;
- Adjustable zips;
- 0

• Note : Possibility of external vacuum with the use of embossed envelopes , (as visible in the photo)

OPTIONS/ACCESSORIES

- Possibility of vacuuming in external containers or gastro-norm containers using a specific kit (Code EM-TUBOGN)
- Inclined Surface for Packaging Liquid Products (Code EM-PI)
- Cart for Machine Support (EM-CR)

CE mark

Made in Italy

power supply Volts frequency (Hz) wer capacity (Kw) net weight (Kg) gross weight (Kg) breadth (mm) depth (mm) height (mm)	AL CARD Monofase V 230/1 50 1,00 40 420 530 400 Sale Example Monofase V 230/1 Solution 1,00 40 420 Sale Base of the security of the securit	PRICE/DELIVERY € 85,74
Volts frequency (Hz) wer capacity (Kw) net weight (Kg) gross weight (Kg) breadth (mm) depth (mm) height (mm)	V 230/1 50 1,00 40 44 420 530 400 XAL CARD	
frequency (Hz) wer capacity (Kw) net weight (Kg) gross weight (Kg) breadth (mm) depth (mm) height (mm)	50 1,00 40 44 420 530 400 XAL CARD	
wer capacity (Kw) net weight (Kg) gross weight (Kg) breadth (mm) depth (mm) height (mm)	1,00 40 44 420 530 400 CARD	
net weight (Kg) gross weight (Kg) breadth (mm) depth (mm) height (mm)	40 44 420 530 400 CARD	
gross weight (Kg) breadth (mm) depth (mm) height (mm)	44 420 530 400 CARD	
breadth (mm) depth (mm) height (mm)	420 530 400 CAL CARD	
depth (mm) height (mm)	530 400 CAL CARD	
height (mm)	400 CAL CARD	
2 · · ·	CAL CARD	
TECHNIC		
	DESCRIPTION	
		£ 95 7/
Inclined surface for li	iguid packaging, suitable for bell-	VAT escluded Shipping to be calculed Delivery from 4 to 9 days
Tube with adapter Tube with adapter sk	sleeve in gastro containers eeve in gastro containers	€ 102,01 VAT escluded Shipping to be calculed Delivery
	Inclined surface for I shaped packaging m	Inclined plane, Mod.PI Inclined surface for liquid packaging, suitable for bell- shaped packaging machines Tube with adapter sleeve in gastro containers Tube with adapter sleeve in gastro containers

EM-CR



Machine Support Trolley, Mod.CR Support trolley







