



**TECNOSERVICE'21 srl**

by Tinti Sergio  
Via Carlo Pisacane, 134  
61032 Fano (PU) Italy  
P.IVA IT0200411413

Tel. +39 0721 805911  
FAX +39 0721 809794  
e-mail: [staff@technochef.it](mailto:staff@technochef.it)  
[www.technochef.it](http://www.technochef.it)  
[www.technochef.eu](http://www.technochef.eu)

Services and Technologies for professional catering since 1973



CODE	DESCRIPTION	PRICE/DELIVERY
TCF055-0310	GLASS-CUP WASHER Bar QUADRO basket 400x400 mm, DIGITAL controls, 3 cycles of 20-30-40 baskets/hour, max glass height 30 cm, with RINSE AID and DETERGENT dispenser, V.230/1, Kw.3,2, Weight 37 Kg, dim.mm.455x550x700h.	<b>€ 917,64</b> <i>VAT excluded</i> <b>Shipping to be calculated</b> <b>Delivery</b> from 8 to 15 days
PROFESSIONAL DESCRIPTION		

**GLASSWASHERS with 400x400 mm SQUARE or 400 mm diameter Round basket with Special Support, output 40-30-20 baskets/hour, DIGITAL controls:**

- **wash and rinse arms** in **AISI 304 stainless steel** , easy to inspect;
- **fully molded self-cleaning tank** to facilitate the outflow of impurities;
- **molded basket supports** to facilitate cleaning of the machine as well as for greater ergonomics
- **multi-chromatic electronic control panel** which allows you to view the different operating stages of the dishwasher;
- **soft start of the washing pump** to prevent lighter objects from tipping over due to the initial surge of the pump;
- **Thermostop system** to ensure rinsing at the right temperature for correct sanitization of the item to be washed;
- **leak-proof roof** ;
- **ease of maintenance** : the most sensitive components have been positioned on the front of the machine (solenoid valve, thermostats, resistances, dispensers, pump, etc.);
- **self-cleaning cycle** of the tank at the end of the day;
- **control panel removable** from the front;
- **drain pump predisposition** ;
- **built-in electric rinse aid and tank detergent dispensers** , adjustable from the control panel;
- **standard non-return valve** ;
- **partial double wall bodywork** , which guarantees a 25% reduction in heat loss;
- double-walled door;
- **3 washing cycles of 90/120/180 sec + continuous cycle** ;
- **hourly productivity: 40-30-20 baskets/hour** ;
- **useful washing height: 300 mm** ;
- water consumption per cycle 2 litres;
- tank capacity: 12 l;
- boiler capacity: 3 l;
- **washing pump power Kw.0,2** ;
- tank resistance: Kw.2,4;
- boiler resistance: Kw.3,00;
- dim.mm.455x550/891x700h.

- **NOTE**
- By ordering the **special SUPPORT** , it is possible to use the **round baskets with a diameter of 400 mm**


- Included :**
- 2 Glass Baskets 400 x 400 mm,
  - 1 Spoon holder basket,
  - 1 saucer rack,
  - 1 Water Inlet Hose (2 m long),
  - 1 Drain Hose (2.5 m long).

- Accessories/Options :**
- **Round basket support mod. 400x400cm** ,
  - **Basket diam.400 mm round.**
  - Drain pump kit,

**CE mark**  
**Made in Italy**

TECHNICAL CARD		
	power supply	Monofase
	Volts	V 230/1
	frequency (Hz)	50
	motor power capacity (Kw)	3,2
	net weight (Kg)	37
	gross weight (Kg)	44
	breadth (mm)	455
	depth (mm)	550
	height (mm)	700
TECHNICAL CARD		
CODE/PICTURES	DESCRIPTION	PRICE/DELIVERY

TCF055-0370



**Round Basket Support**  
Round basket support diam.40 cm

**€ 14,73**  
*VAT excluded*  
**Shipping to be calculated**  
**Delivery** from 4 to 9 days

TCF055-0360



**40x40 Square Basket**  
Square basket 40x40 cm

**€ 24,74**  
*VAT excluded*  
**Shipping to be calculated**  
**Delivery** from 4 to 9 days


TCF055-0350



**Round Basket Ø 40**  
Round basket diam.40 cm

**€ 28,28**  
*VAT excluded*  
**Shipping to be calculated**  
**Delivery** from 4 to 9 days



TCF055-0485



**Drain Pump Kit**  
Underbase drain pump kit

**€ 93,60**  
*VAT excluded*  
**Shipping to be calculated**  
**Delivery** from 4 to 9 days



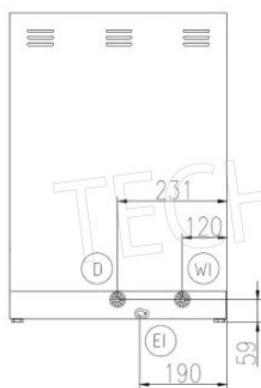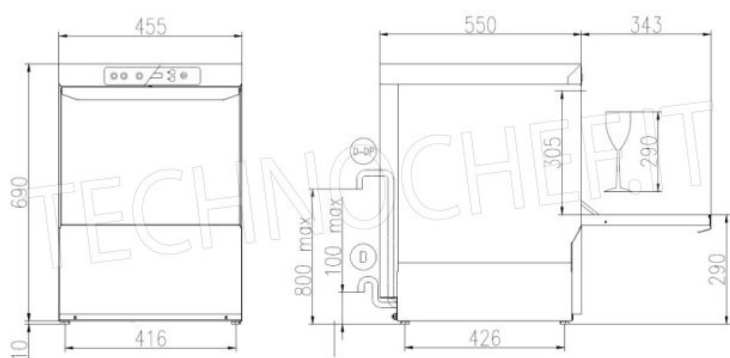

- (EI) CAVO DI ALIMENTAZIONE  
POWER CORD SUPPLY  
CABLE D'ALIMENTATION  
CABLE DE ALIMENTACION
- (WI) CANNA DI CARICO G 3/4 L=2000 mm  
G 3/4 INLET HOSE L=2000 mm  
TUYAU D'ALIMENTATION G 3/4" L=2000 mm  
TUBO DE ALIMENTACION G 3/4" L=2000 mm
- (D) TUBO DI SCARICO Ø 29 mm L=2500 mm  
DRAIN HOSE Ø 29 mm L=2500 mm  
TUYAU DE VIDANGE Ø 29 mm L=2500 mm  
TUBO DE DESAGUE Ø 29 mm L=2500 mm
- (D-DF) TUBO DI SCARICO Ø 29 mm L=2500 mm (CON POMPA SCARICO)  
DRAIN HOSE Ø 29 mm L=2500 mm (WITH DRAIN PUMP)  
TUYAU DE VIDANGE Ø 29 mm L=2500 mm (AVEC POMPE DE VIDANGE)  
TUBO DE DESAGUE Ø 29 mm L=2500 mm (CON POMPA DE DESAGUE)