



TECNOSERVICE'21 srl

by Tinti Sergio
Via Carlo Pisacane, 134
61032 Fano (PU) Italy
P.IVA IT0200411413

Tel. +39 0721 805911
FAX +39 0721 809794
e-mail: staff@technochef.it
www.technochef.it
www.technochef.eu

Services and Technologies for professional catering since 1973



TECHNICAL CARD

power supply	Monofase
Volts	V 230/1
frequency (Hz)	50
motor power capacity (Kw)	1,00
gross weight (Kg)	150
breadth (mm)	810
depth (mm)	715
height (mm)	2085

PROFESSIONAL DESCRIPTION

FREEZER-FREEZER CABINET 1 Door, 650 lt, Temp.-10°/-22°C, ECOLOGICAL in Class D, ICE Line :

- The Ice cabinet was born from the need to **store ice cream , semifreddo , mousse and single portions** . Ice technology supports you every day to **always keep the quality of your artisanal ice cream perfect** ;
- **Internal/external in AISI 304 stainless steel** ;
- External back, external bottom and internal technical compartment in galvanized/laminated steel;
- Rounded internal corners for easy cleaning;
- **Racks and guides in AISI 304 stainless steel** ;
- **AISI 304 stainless steel handle** , 2 mm thick;
- **1 self-closing door** with 105° stop, hinges on the right;
- Triple chamber door seal, magnetic, easily replaceable;
- **Maximum capacity of ice cream containers** :
 - **8 7.1 liter basins** (36x16.5x15 cm);
 - **27 5 liter containers** (36x16.5x12 cm);
 - **22 5.4 liter containers** (36x25x8 cm);
 - **24 liter carabiners. 7.3** (Ø20x25 cm);
 - **48 carapines 3.9 liters** (Ø20x12.5 cm);
- **Ventilated refrigeration** with indirect air flow;
- **Hot gas/electric defrost** (remote)

- **Automatic evaporation** of condensate;
- Monocoque structure with **75 mm insulation** - CFC/HCFC free;
- **Electronic control , flush panel display ;**
- Made with FSS - Fast Service System - technology for easy and fast service;
- Single compartment for EN60x40 supports
- **led illumination ;**
- **Lock with key ;**
- Adjustable **feet in AISI 304 stainless steel** h 100-150 mm.

TECHNICAL DATA :


- Gross capacity 573 litres
- Temperature range -10°-22°C
- Plug-In refrigeration unit
- Energy efficiency class D
- Energy efficiency index: 59.5
- Annual consumption: 1794 kW/h per annum
- 24h consumption: 4,915 kW/h/24h
- Climate class: 5
- Ecological refrigerant gas R290
- Solenoid valve supplied as standard
- Power consumption 1000 W
- Current absorbed 4.6 A
- Cooling capacity 692 W* (Evap. -30°C Cond. +55°C)
- Annual consumption 1794 kWh

Supplied :









- 8 pairs of guides for 60x40 cm grids
- 8 plasticized grids 60x40 cm

CE MARK
MADE IN ITALY

CODE	DESCRIPTION	PRICE/DELIVERY
TCF375-000600	Armdadio Freezer-Freezer for Ice Cream, 1 Door, for 27 TRAYS of 5 lt, Professional, lt.650, Temp. -10°/ -22°C, Ventilated, ECOLOGICAL in Class D, Gas R290, V.230/1, Kw.1,00, Weight 150 Kg, dim.mm.810x715x2085h	



Caratteristiche principali

 <p>Fondo modulare Consente l'installazione su ruote, piedini, zoccolo fisso o mobile.</p>	 <p>Isolamento 75 mm Spessore isolamento 75 mm CFC/HCFC free.</p>	 <p>Serratura e fermo porta Porte autochiudenti reversibili con fermo a 105° dotate di serratura con chiave.</p>	 <p>Guarnizioni sostituibili ad alta tenuta Geometria a tripla camera con innovativa miscela D7, efficacia d'isolamento superiore del 35% rispetto alle tradizionali.</p>
 <p>Versioni Plug-In o Remote Motore a bordo o posizionamento remoto dell'unità condensante per un ambiente di lavoro fresco e silenzioso.</p>	 <p>Doppia porta L'installazione della doppia porta (optional) evita gli sbalzi termici e favorisce il mantenimento della temperatura.</p>	 <p>Ventilatore Intelligente I ventilatori si arrestano automaticamente all'apertura della porta per evitare l'aspirazione di aria calda dall'esterno.</p>	 <p>Guide e cremagliere Le cremagliere con foratura ad asola consentono un facile riposizionamento delle guide.</p>



Tutto lo spazio che serve per conservare il gelato




Ice 650 l.

P armadio 715 mm
Griglia 60x40 cm




18 bacinelle 7,1 l. (36x16,5x15 cm) 27 bacinelle 5 l. (36x16,5x12 cm)



22 bacinelle 5,4 l. (36x25x8 cm)



24 carapine 7,3 l. (Ø20x25 cm) 48 carapine 3,9 l. (Ø20x12,5 cm)

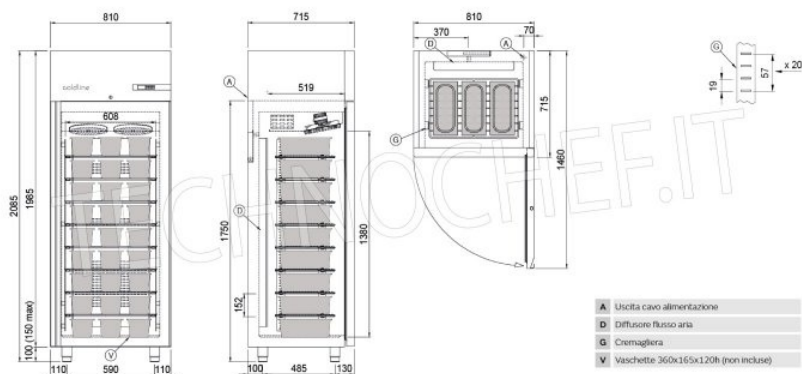

- A Uscita cavo alimentazione
- D Diffusore flussio aria
- G Cremagliera
- V Vaschette 360x165x120h (non incluse)

	Dimensioni	N°
Bacinella	360x165x120 mm	27
	360x250x80 mm	22
	360x165x150 mm	18
Carapina	Ø 200x200x125 mm	48
	Ø 200x200x250 mm	24