



**TECNOSERVICE'21 srl**

by Tinti Sergio  
Via Carlo Pisacane, 134  
61032 Fano (PU) Italy  
P.IVA IT0200411413

Tel. +39 0721 805911  
FAX +39 0721 809794  
e-mail: [staff@technochef.it](mailto:staff@technochef.it)  
[www.technochef.it](http://www.technochef.it)  
[www.technochef.eu](http://www.technochef.eu)

Services and Technologies for professional catering since 1973



CODE	DESCRIPTION	PRICE/DELIVERY
<b>TCF375-000600</b>	Armdadio Freezer-Freezer for Ice Cream, 1 Door, for 27 TRAYS of 5 lt, Professional, lt.650, Temp. -10°/ -22°C, Ventilated, ECOLOGICAL in Class D, Gas R290, V.230/1, Kw.1,00, Weight 150 Kg, dim.mm.810x715x2085h	
PROFESSIONAL DESCRIPTION		

## **FREEZER-FREEZER CABINET 1 Door, lt.650, Temp.-10°/-22°C, ECOLOGICAL in Class D, ICE Line :**

- The Ice cabinet was born from the need to **store ice cream , semifreddos , mousses and single portions** . Ice technology supports you every day to **always keep the quality of your homemade ice cream perfect** ;
- **Internal/external in AISI 304 stainless steel** ;
- External back, external bottom and internal technical compartment in galvanized/colaminated steel;
- Rounded internal corners for easy cleaning;
- **Racks and guides in AISI 304 stainless steel** ;
- **Handle in AISI 304 stainless steel** , thickness 2 mm;
- **1 self-closing door** with stop at 105°, hinges on the right;
- Triple chamber door gasket, magnetic, easily replaceable;
- **Maximum ice cream container capacity** :
  - **8 basins lt.7,1** (36x16,5x15 cm);
  - **27 bowls lt.5** (36x16.5x12 cm);
  - **22 basins lt.5,4** (36x25x8 cm);
  - **24 carapine lt. 7.3** (Ø20x25cm);
  - **48 tubs lt.3,9** (Ø20x12,5 cm);
- **Ventilated refrigeration** with indirect air flow;
- **Hot gas / electric defrost** (remote)
- **Automatic evaporation** of condensate;
- Monocoque structure with **75 mm insulation** - CFC/HCFC free;
- **Electronic control , flush panel display** ;
- Made with FSS technology - Fast Service System - for an easy and fast service;
- Single compartment for EN60x40 supports
- **LED lighting** ;
- **Lock with key** ;
- Adjustable **feet in AISI 304 stainless steel** h 100-150 mm.

### **TECHNICAL DATA :**

- Gross capacity 573 l
- Temperature range -10°-22°C
- Plug-In refrigeration unit
- Energy efficiency class D
- Energy efficiency index: 59.5
- Annual consumption: 1794 kW/h annum
- Consumption 24h: 4.915 kW/h/24h
- Climate class: 5
- R290 ecological refrigerant gas
- Solenoid valve supplied as standard
- Absorbed power 1000 W
- Current consumption 4.6A
- Cooling capacity 692 W\* (Evap. -30°C Cond. +55°C)
- Annual consumption 1794 kWh

### **Included :**

- 8 pairs of guides for 60x40 cm grids
- 8 plasticized grids 60x40 cm

**CE MARK**  
**MADE IN ITALY**

### **TECHNICAL CARD**

<b>power supply</b>	Monofase
<b>Volts</b>	V 230/1
<b>frequency (Hz)</b>	50
<b>motor power capacity (Kw)</b>	1,00
<b>gross weight (Kg)</b>	150
<b>breadth (mm)</b>	810
<b>depth (mm)</b>	715
<b>height (mm)</b>	2085



## Caratteristiche principali



### Fondo modulare

Consente l'installazione su ruote, piedini, zoccolo fisso o mobile.



### Isolamento 75 mm

Spessore isolamento 75 mm CFC/HCFC free.



### Serratura e fermo porta

Porte autochiudenti reversibili con fermo a 105° dotate di serratura con chiave.



### Guarnizioni sostituibili ad alta tenuta

Geometria a tripla camera con innovativa mescola D7, efficacia d'isolamento superiore del 35% rispetto alle tradizionali.



### Versioni Plug-In o Remote

Motore a bordo o posizionamento remoto dell'unità condensante per un ambiente di lavoro fresco e silenzioso.




### Doppia porta

L'installazione della doppia porta (optional) evita gli sbalzi termici e favorisce il mantenimento della temperatura.



### Ventilatore Intelligente

I ventilatori si arrestano automaticamente all'apertura della porta per evitare l'aspirazione di aria calda dall'esterno.



### Guide e cremagliere

Le cremagliere con foratura ad asola consentono un facile riposizionamento delle guide.




Tutto lo spazio che serve per conservare il gelato




### Ice 650 l.

P armadio 715 mm  
Griglia 60x40 cm




18 bacinelle 7,1 l. 27 bacinelle 5 l.  
(36x16,5x15 cm) (36x16,5x12 cm)



22 bacinelle 5,4 l.  
(36x25x8 cm)



24 carapine 7,3 l. 48 carapine 3,9 l.  
(Ø20x25 cm) (Ø20x12,5 cm)

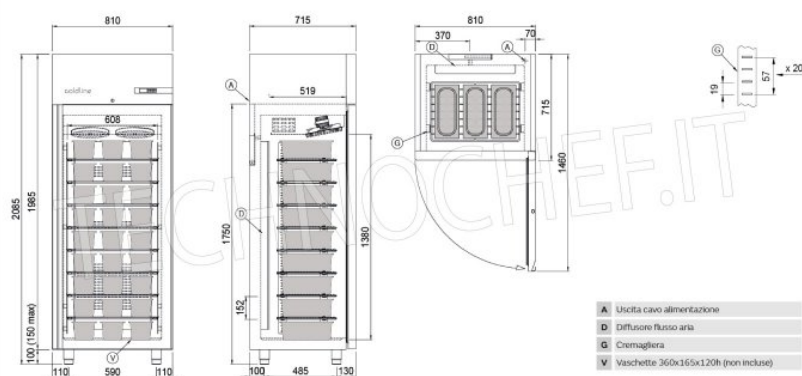

	Dimensioni	N°
	360x165x120 mm	27
Bacchetta	360x250x80 mm	22
	360x165x150 mm	18
Carapina	Ø 200x200x125 mm	48
	Ø 200x200x250 mm	24