


TECNOSERVICE'21 srl by Tinti Sergio Via Carlo Pisacane, 134 61032 Fano (PU) Italy P.IVA IT0200411413 Tel. +39 0721 805911 FAX +39 0721 809794 e-mail: staff@technochef.it www.technochef.it www.technochef.eu

Services and Technologies for professional catering since 1973

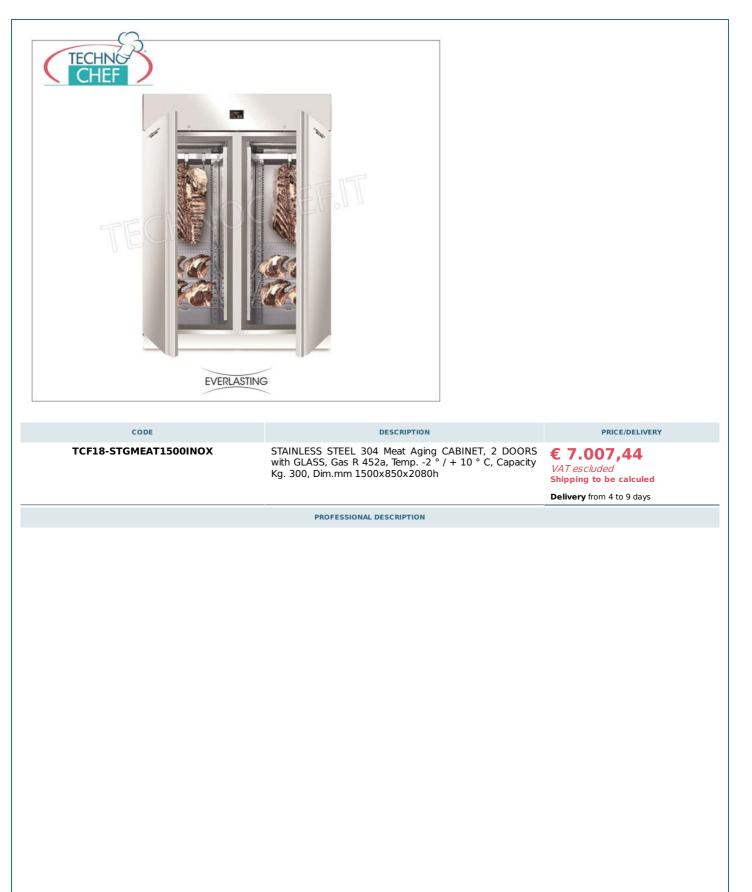

MEAT STAINLESS STEEL CABINET, 2 DOORS, IN STAINLESS STEEL, TEMPERATURE -2 $^\circ$ / + 10 $^\circ$ C, CAPACITY Kg. 300, DIM. cm 150x85x208h:

- STEEL structure with 2 DOORS ;
- Internal and external structure in AISI 304 stainless steel with Scotch Brite finishes
- Interior with rounded edges and printed bottom;
- $\circ~$ Racks, grids and guides in AISI 304 stainless steel;
- Height- adjustable stainless steel feet (130/200 mm)
- UV-C germicidal lamp as standard;
- Internal lighting with K6500 LED bars;
- $\circ~$ Self-closing doors with 105 $^\circ$ stop with easily replaceable magnetic seals and key lock;
- 0 0
- $\circ~$ Operating temperature -2 $^\circ$ / + 10 $^\circ$ C
- Active humidity regulation from 40% to 90%
- It does not require connection to the water mains;
- 75 mm insulation thickness;
- Ventilated refrigeration with cataphoresis treated evaporator;
- ECOLOGICAL GAS refrigerant R452A;
- Automatic evaporation of condensation water with self-regulating electric resistance;
- Automatic defrost with electric resistance;
- 0 0
- Wi-Fi connection for remote viewing and control;
- USB device for software update;
- MEAT Touch electronic control panel with 4.3 " touch screen display;
- N. 3 preset recipes , programmable up to 4 distinct phases for each recipe;
- 10 fully customizable recipes that can be stored on the instrument;
- Constant visualization of the internal temperature and humidity on the display;
- Clock and calendar (RTC) and Multilingual Menu ;
- 0
- Power supply : 230/1/50 Hz
- Dimensions mm . 1500x850x2080h
- Weight: Kg. 193
- Capacity Kg. 300
- Standard meat hook with max capacity 80 Kg;

Included : meat hook with 2 hooks + 3 stainless steel grids;

CE MARK Made in Italy

TECHNICAL CARD	
power supply	Monofase
Volts	V 230/1
frequency (Hz)	50
motor power capacity (Kw)	1,7
net weight (Kg)	193
gross weight (Kg)	205
breadth (mm)	1500
depth (mm)	850
height (mm)	2080