



CODE	DESCRIPTION	PRICE/DELIVERY
ITL-TT2X	Rapid cooler for 2 table bottles with timer, yield: 750 cc bottle cooling. from 25° to 10 °C in about 10 minutes, V.230/1, Kw.0,2, Weight 45 Kg., dim.mm.283x605x445h	€ 1.042,12 <i>VAT excluded</i> Shipping to be calculated Delivery from 8 to 15 days

PROFESSIONAL DESCRIPTION

RAPID TABLE COOLER for 2 BOTTLES, with TIMER (buzzer):



- **yield: cooling of 75 cc bottle : from 25° to 10°C in about 10 minutes ;**
- **capacity: 2 bottles ;**
- simple to use thanks to the flexible and **individual regulation** , it allows to always obtain the **suitable cooling for each type of wine in a few minutes** , enhancing its aroma and taste without altering its characteristics and organoleptic properties as attested by sommeliers and oenologists;
- **compact , elegant and easy to handle** , it fits into any environment;
- ideal for wine bars, bars, restaurants, hotels, exhibition stands, banquets, weddings and even at home for friendship toasts;
- **suitable for any type of wine , champagne , beer and still water ;**
- also excellent for cans and plastic bottles;
- it works with a **special coolant** contained inside the tank;
- the **bottles to be cooled are gently introduced into the pre-selected cooling well ;**
- equipped with a **timer** that acts as a guide to know how long you want your bottle to remain immersed in the well and an **acoustic alarm** warns that the selected time has expired; if the bottle remains immersed for too long after the buzzer sounds, it may freeze and break (**the machine is always in operation and the bottle cools down even if the timer is not activated**);
- **place the machine away from heat sources** and in an environment with **minimum temperature: +10°C** and **maximum: +30°C** ;
- **tank volume: 15 lt .;**
- **refrigerant gas: R134a ;**
- **consumption: 2Kw/24h ;**
- when starting up, it takes 8 hours before starting to use the machine to allow the correct operating temperature of the liquid to be reached.

CE mark
Made in Italy

TECHNICAL CARD

power supply | Monofase

Volts	V 230/1
frequency (Hz)	50
motor power capacity (Kw)	0,2
net weight (Kg)	45
breadth (mm)	283
depth (mm)	605
height (mm)	445

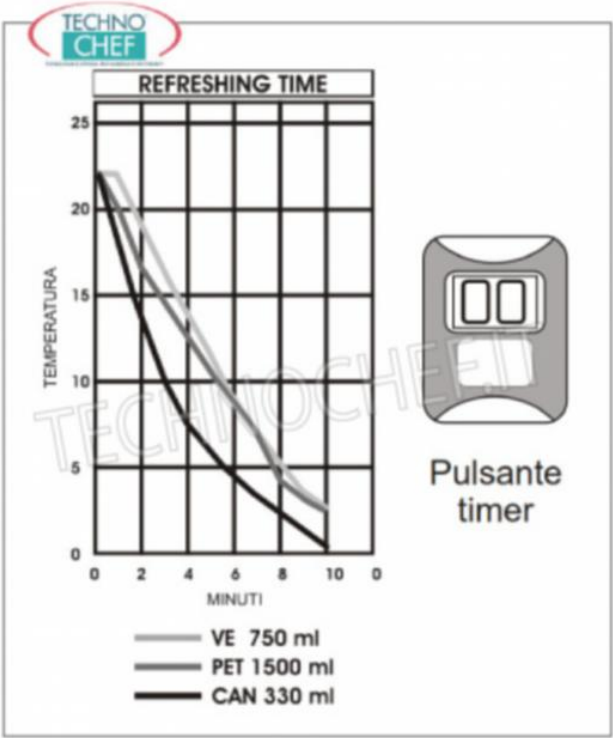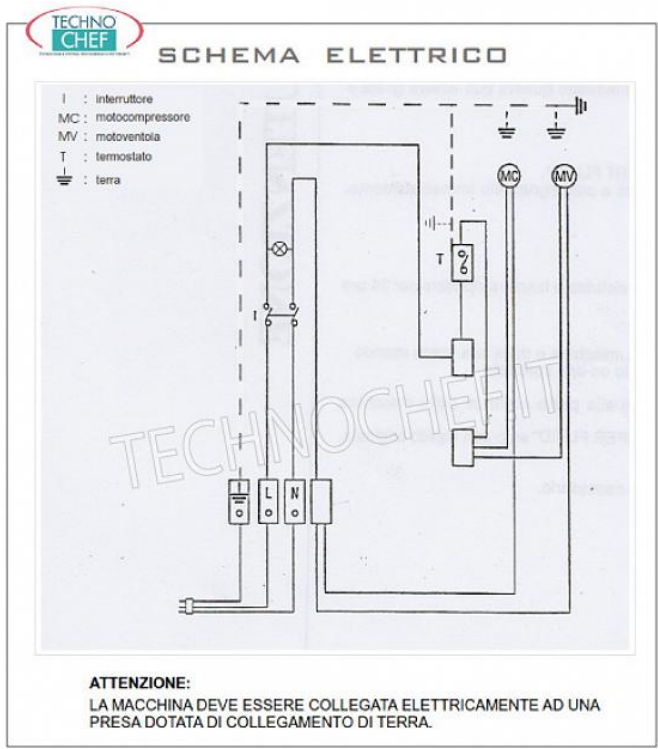

**E' IMPORTANTE CHE LA MACCHINA SIA POSIZIONATA
IN MODO CHE L'ARIA PASSI LIBERAMENTE
DALLE GRIGLIE LATERALI
NON ACCOSTARE LATERALMENTE AL MURO A
MENO DI 20 cm DI DISTANZA**

