



CODE	DESCRIPTION	PRICE/DELIVERY
ITL-FS3X	Trolley version cooler for 3 bottles with timer, yield: 750 cc bottle cooling. from 25° to 10 °C in about 10 minutes, V.230/1, Kw.0,32, Weight 70 Kg.,dim.mm.370x630x720h	€ 1.320,01 <i>VAT excluded</i> Shipping to be calculated Delivery from 8 to 15 days



PROFESSIONAL DESCRIPTION

COOLER for 3 BOTTLES, TROLLEY version with TIMER (buzzer):

- **yield: cooling of 75 cc bottle : from 25° to 10°C in about 10 minutes ;**
- **capacity: 3 bottles ;**
- simple to use thanks to the flexible and **individual regulation** , it allows to always obtain the **suitable cooling for each type of wine in a few minutes** , enhancing its aroma and taste without altering its characteristics and organoleptic properties as attested by sommeliers and oenologists;
- **compact , elegant and easy to handle** , it fits into any environment;
- ideal for wine bars , bars , restaurants , hotels , exhibition stands , banquets , weddings and even at home for friendship toasts;
- **suitable for any type of wine , champagne , beer and natural water ;**
- also excellent for cans and plastic bottles;
- it works with a **special coolant** contained inside the tank;
- the **bottles to be cooled are gently introduced into the pre-selected cooling well ;**
- equipped with a **timer** that acts as a guide to know how long you want your bottle to remain immersed in the well and an **acoustic alarm** warns that the selected time has expired; if the bottle remains immersed for too long after the buzzer sounds, it may freeze and break (**the machine is always in operation and the bottle cools down even if the timer is not activated**);
- **place the machine away from heat sources** and in an environment with **minimum temperature: +10°C** and **maximum: +30°C** ;
- **tank volume: 15 lt .;**
- **refrigerant gas: R404a ;**
- **consumption: 2,5Kw/24h ;**
- when starting up, it takes 3/4 hours before starting to use the machine to allow the correct operating temperature of the liquid to be reached.

CE mark
Made in Italy

power supply	Monofase
Volts	V 230/1
frequency (Hz)	50
motor power capacity (Kw)	0,32
net weight (Kg)	70
breadth (mm)	370
depth (mm)	630
height (mm)	720

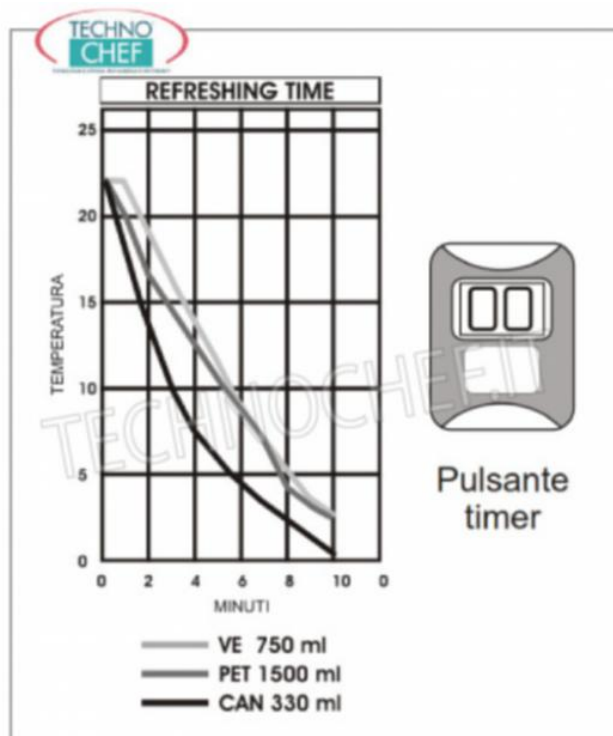
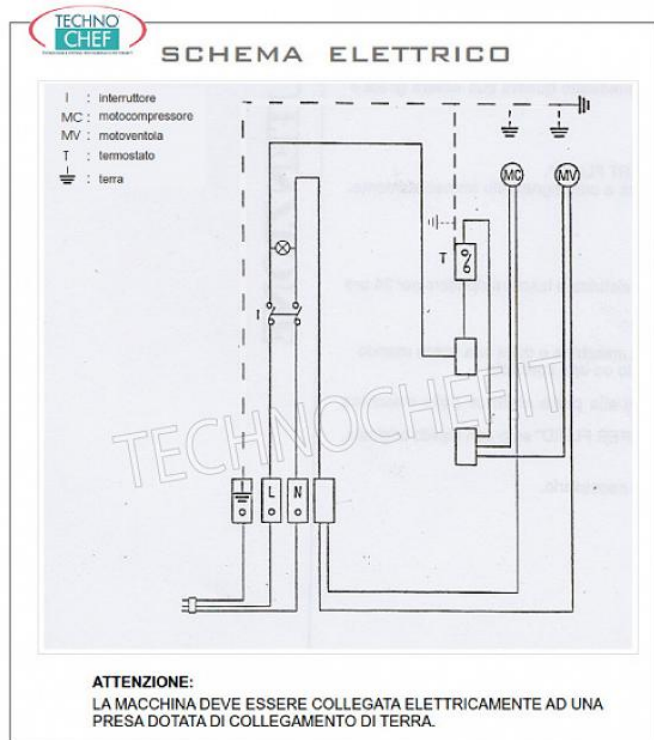




SOLLEVARE IL
COPERCHIO E
TOGLIERE IL
TAPPO(A) PER
CONSENTIRE LO
SFIATO DELL'ARIA



È IMPORTANTE CHE LA MACCHINA SIA POSIZIONATA IN
MODO CHE L'ARIA PASSI LIBERAMENTE DALLE GRIGLIE
LATERALI.
NON ACCOSTARE LATERALMENTE AL MURO A MENO DI 20
cm DI DISTANZA.



Estrarre uno dei sacchetti barriera
e versare il liquido all'interno della vasca

