



**TECNOSERVICE'21 srl**

by Tinti Sergio  
Via Carlo Pisacane, 134  
61032 Fano (PU) Italy  
P.IVA IT0200411413

Tel. +39 0721 805911  
FAX +39 0721 809794  
e-mail: [staff@technochef.it](mailto:staff@technochef.it)  
[www.technochef.it](http://www.technochef.it)  
[www.technochef.eu](http://www.technochef.eu)

Services and Technologies for professional catering since 1973



#### TECHNICAL CARD

<b>power supply</b>	Monofase
<b>Volts</b>	V 230/1
<b>frequency (Hz)</b>	50
<b>motor power capacity (Kw)</b>	1,8
<b>breadth (mm)</b>	610
<b>depth (mm)</b>	600
<b>height (mm)</b>	1100

#### PROFESSIONAL DESCRIPTION

**Automatic vacuum heat sealer for trays, performed on a trolley :**

- made of **stainless steel** ;
- **possibility of varying the temperature and welding time** ;
- seals **trays with maximum gastro-norm size 1/2 (325x260 mm)** ;
- **availability of moulds (not included)** with **1 impression** for 1/2 gastro-norm trays, with **2 impressions** for 1/4 gastro-norm trays and with **4 impressions** for 1/8 gastro-norm trays;
- **LCD+sensor-VAC digital controls** ;
- automatic work cycle;
- **self-opening** tub lid;
- **vacuum sensor** ;
- provision for inert gas inlet;
- **40 cubic meter/hour vacuum pump** ;
- max press.:  $\pm 3$  BAR;
- side support for **transparent film reel** ;
- **manual** film feed.
- **IMPORTANT: - to operate the machine requires an air compressor** with a minimum tank of 16/18 litres with an operating pressure of 1.5 atmospheres; - if the **packaging of products such as MEAT ... requires the use of gas mixtures rich in oxygen** (percentage **greater than 20%** ) for packaging, it is **STRONGLY RECOMMENDED** to use an **EXPLOSION-PROOF vacuum pump** for safety reasons, - available as an optional upon request.



#### OPTIONAL - ACCESSORIES


- 1-impression aluminum **mold** ;
- 2-cavity aluminum **mold** ;
- 4-cavity aluminum **mold** ;
- Air/gas inlet **regulation pressure gauge** ;

**CE MARK**  
**MADE IN ITALY**

CODE	DESCRIPTION	PRICE/DELIVERY
<b>EM-TRAY800</b>	Vacuum/gas heat sealer, for PREFORMED TRAYS, AUTOMATIC on TROLLEY CABINET, digital controls, for CONTAINERS MAXIMUM SIZE of mm 265x325, V 230/1, Kw 1.8, Weight 180 Kg, external dimensions mm 610x600x1100h	<b>Delivery</b> from 4 to 9 days

#### TECHNICAL CARD

CODE/PICTURES	DESCRIPTION	PRICE/DELIVERY
<b>EM-TRAYGN1/2</b> 	<b>TECHNOCHEF - Anticorodal aluminum mold, Mod.GN1/2</b>	<b>Delivery</b> from 4 to 9 days
<b>EM-TRAYGN1/4</b> 	<b>TECHNOCHEF - Anticorodal aluminum mold, Mod.GN1/4</b>	<b>Delivery</b> from 4 to 9 days
<b>EM-TRAYGN1/8</b> 	<b>TECHNOCHEF - Anticorodal aluminum mold, Mod.GN1/8</b>	<b>Delivery</b> from 4 to 9 days

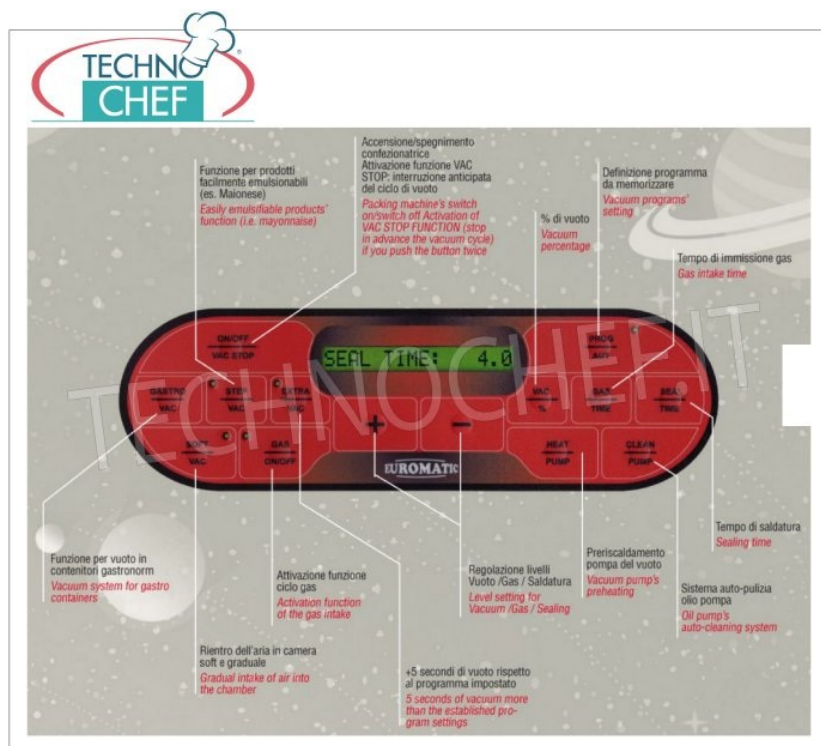





Saldatura a mezzo pistone  
pneumatico 3 ATA  
*Sealing by pneumatic piston, 3 Ata*



Fustellatura manuale  
delle vaschette  
*Manual trays cutting*



STAMPO GN 1/2 mm 265x320  
*MOULD GN 1/2 mm 265x320*



STAMPO GN 1/4 mm 265x160  
*MOULD GN 1/4 mm 265x160*



STAMPO GN 1/8 mm 160x130  
*MOULD GN 1/8 mm 160x130*