



PROFESSIONAL DESCRIPTION

SALAMI FILLER, VERTICAL HYDRAULIC, CAPACITY lt. 15, available in SINGLE-PHASE and THREE-PHASE version :

- **new IDRA vertical hydraulic bagging machines** rely on a **powerful hydraulic system** that works at 120 Bar pressure;
- **built entirely in stainless steel**, **totally removable for cleaning** without the use of tools;
- **lid and pad totally in stainless steel** ;
- **silicone gaskets** that act inside the cylinder for greater sealing and durability of the gasket itself;
- **hermetic protection of the hydraulic cylinder** ;
- **piston rod in stainless steel** ;
- **cylinder in stainless steel** , polished and reborded, without forced direction;
- powerful and silent **fan motor at 2,800 rpm** with immediate action;
- **automatic piston return** with engine shutdown;
- 24 V controls;
- **high precision oil flow regulator** ;
- **oil tank with level indicator** ;
- standard rubber wheels;
- **cylinder dimensions** : diameter 200 mm, length 495 mm;
- piston stroke: 430 mm;
- minimum speed empty: 2'11 ";
- max emptying speed: 59 ";
- piston return speed: 35 ".

Included :

- 3 funnels in food-grade polyethylene with a diameter of 10-18-25 mm

Accessories / Optionals :

- stainless steel ring
- Set of 4 funnels in stainless steel with diameter 16-20-28-38 mm

CE mark

Made in Italy

TECHNICAL CARD

net weight (Kg) 53

gross weight (Kg)	63
breadth (mm)	490
depth (mm)	370
height (mm)	1200

AVAILABLE MODELS

SI-IS15IDRA/T



Delivery

VERTICAL HYDRAULIC MEAT FILLER in STAINLESS STEEL, Capacity lt. 15, V.400 / 3

INSACCATRICE by CARNE HYDRAULIC VERTICAL in acciaio inox, capacity lt.15, in dotazione 3 imbuti diameter 10-18-25 mm, V.400/3, Kw.0,56, Peso 63 Kg, dim.mm.490x370x1200h

SI-IS15IDRA/M



Delivery

VERTICAL HYDRAULIC MEAT FILLER in STAINLESS STEEL, Capacity lt. 15, V.230 / 1

INSACCATRICE by CARNE HYDRAULIC VERTICAL in acciaio inox, capacity lt.15, in dotazione 3 imbuti diameter 10-18-25 mm, V.230/1, Kw.0,56, Peso 63 Kg, dim.mm.490x370x1200h



Estrema facilità di pulizia



Guarnizione ermetica su cilindro
oleodinamico



Azionamento spinta pistone



Ritorno pistone automatico




Particolare centralina e comandi



Ghiera inox
opzionale



Imbuti inox (ø 13-16-20-25-28-38)
opzionali

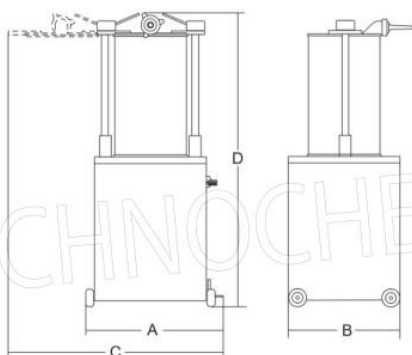

Dimensioni mm				
Modello	A	B	C	D
IS 15 IDRA	490	370	700	1200
IS 25 IDRA	565	450	950	1160
IS 35 IDRA	640	480	1000	1160
IS 50 IDRA	730	550	1130	1250