



**TECNOSERVICE'21 srl**

by Tinti Sergio  
Via Carlo Pisacane, 134  
61032 Fano (PU) Italy  
P.IVA IT0200411413

Tel. +39 0721 805911  
FAX +39 0721 809794  
e-mail: [staff@technochef.it](mailto:staff@technochef.it)  
[www.technochef.it](http://www.technochef.it)  
[www.technochef.eu](http://www.technochef.eu)

Services and Technologies for professional catering since 1973



**forcar**

CODE	DESCRIPTION	PRICE/DELIVERY
<b>FO-G-PZ2600TN</b>	REFRIGERATED PIZZA COUNTER 2 DOORS, GRANITE top temperature -2°/+8°C, Ventilated, ECOLOGICAL in CLASS B, GAS R290, V.230/1, Kw.0,26, Weight 257 Kg, dim.mm.1510x800x1000h	<b>Delivery</b> from 8 to 15 days
PROFESSIONAL DESCRIPTION		

**REFRIGERATED PIZZA COUNTER 2 DOORS , with GRANITE WORKTOP and BACKPACK , operating temperature \*2°/+8° , Class B:**

- **Aisi 304 stainless steel structure** ,
- **granite worktop** with **splashback on 3 sides** ,
- **2 refrigerated compartments** capable of hosting **600x400x70h mm loaf boxes** ,
- **neutral drawer above technical compartment** ;
- **capacity 390 litres** ;
- **ventilated refrigeration** ,
- **built-in extractable group** for easy maintenance;
- insulation thickness: 50 mm;
- **circular flow of the cold air** so as not to directly touch the product;
- **electronic temperature control with digital thermostat** ;
- electric resistance around the door frame to eliminate condensation;
- **automatic defrost with electric resistance** ,
- **automatic defrost temperature control** ;
- **automatic evaporation of condensation water** ;
- anti-corrosion treated evaporator;
- **ECOLOGICAL GAS R290** ;
- **ENERGY CLASS B** ;
- max ambient temperature/humidity: +32°C / 55%HR;
- door with return spring;
- door seal removable without tools, bottom with rounded corners;
- **height-adjustable feet in Aisi 304 stainless steel** ;
- stainless steel backrest, possibility of leaning against the wall.



**Supplied :**

- n.7 pairs of guides per door

**CE mark****Made in ASIA****TECHNICAL CARD**

<b>power supply</b>	Monofase
<b>Volts</b>	V 230/1
<b>frequency (Hz)</b>	50
<b>motor power capacity (Kw)</b>	0,26
<b>net weight (Kg)</b>	257
<b>gross weight (Kg)</b>	288
<b>breadth (mm)</b>	1510
<b>depth (mm)</b>	800
<b>height (mm)</b>	1000

**TECHNICAL CARD**

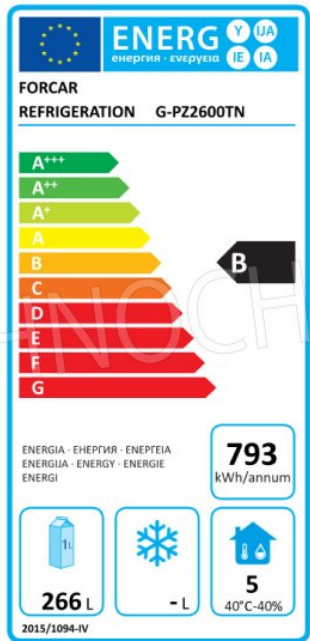

CODE/PICTURES	DESCRIPTION	PRICE/DELIVERY
<b>FO-GRP64</b> 	<b>Forcar - Plasticized Grid</b> 600x400 mm plastic coated grid	<b>Delivery</b> from 4 to 9 days
<b>FO-GUT</b> 	<b>Forcar - Driving Couple</b> Pair of trays for trays	<b>Delivery</b> from 4 to 9 days

FO-GAR



**Forcar - Pair of anti-tilt guides**  
Pair of anti-tilt guides for grill

**Delivery** from 4 to 9 days



ENERGIA - ЕНЕРГИЯ - ΕΝΕΡΓΕΙΑ  
ENERGIA - ENERGY - ENERGIE  
ENERGI

**266 L**

**793 kWh/annum**

**5**  
40°C-40%

2015/1094-IV