



TECNOSERVICE'21 srl

by Tinti Sergio
Via Carlo Pisacane, 134
61032 Fano (PU) Italy
P.IVA IT0200411413

Tel. +39 0721 805911
FAX +39 0721 809794
e-mail: staff@technochef.it
www.technochef.it
www.technochef.eu

Services and Technologies for professional catering since 1973



| CODE | DESCRIPTION | PRICE/DELIVERY |
|---------------------|--|------------------------------------|
| BS-G7F6PW+FE | GAS COOKER 6 BURNERS on ELECTRIC OVEN GN 2/1, BERTO'S, MACROS 700 line, ECO POWER series, thermal power Kw.33,5 + electric power Kw 7,5, Weight 112 Kg, dim.mm.1200x700x900h | Delivery from 15 to 25 days |

PROFESSIONAL DESCRIPTION

GAS STOVE with 6 BURNERS on ELECTRIC OVEN GN 2/1, MACROS 700 Line, ECO POWER Series :

- **worktop and front panels in AISI 304 stainless steel ;**
- **burners entirely in cast iron , guaranteed for life** , operated by a valved tap and fixed liquid-tight to the deep drawn **AISI 304 steel hob** ;
- **safety thermocouple and burner pilot flame protected by a brass cover** for easy cleaning and maintenance;
- **90 mm burners entirely in cast iron** , with regulation up to 3.5 kW , and **120 mm** , with regulation up to 6 kW ;
- **open fire power n°x kW : 1 x 3.5 kW + 5 x 6 kW ;**
- **electric oven** with incoloy stainless steel heating elements with increased diameter;
- **grill with salamander function** in the upper part and **thermostat** that allows accurate **temperature regulation from 50 to 270 °C** ;
- **oven chamber in AISI 430** , with **4-level supports** ;
- **capacity 4 GN 2/1 trays** (530x650 mm);
- molded and ribbed stainless steel inner door;
- **line indicator and temperature indicator** ;
- Highly resistant handle in AISI 304 stainless steel, thickness 20/10
- adjustable feet;
- **2 year warranty .**

Supplied :

- 1 anti-tipping oven rack

Accessories/Options:

- compartment door

CE mark

Made in Italy

TECHNICAL CARD

power supply Trifase

| | |
|----------------------------------|------------|
| Volts | V 400/3 +N |
| frequency (Hz) | 50 |
| motor power capacity (Kw) | 7,5 |
| Thermal input (Kw) | 33,5 |
| net weight (Kg) | 112 |
| gross weight (Kg) | 127 |
| breadth (mm) | 1200 |
| depth (mm) | 700 |
| height (mm) | 900 |

TECHNICAL CARD

| CODE/PICTURES | DESCRIPTION | PRICE/DELIVERY |
|---------------|-------------|----------------|
|---------------|-------------|----------------|

BS-1PDX



TECHNOCHEF - Right Door, Mod.1PDX
Right hand door for 400 mm compartment

Delivery from 4 to 9 days

BS-1PSX




TECHNOCHEF - Left Door, Mod.1PSX
Left door for 400 mm compartment

Delivery from 4 to 9 days



macros 700





| | | | | | |
|---|---------|--------------------|--|--|--|
|  | n. | 6 | | | |
| | Ø mm | 120 | | | |
| | kW | 8 | | | |
| | kcal/h | 6.880 | | | |
| | Btu/h | 27.296 | | | |
|  | GN | 2/1 | | | |
| TOT. | mm | 530 x 650 x 4 pos. | | | |
| | kW | 7,5 (4,5+3) | | | |
|  | kW | 48+7,5 | | | |
| TOT. | kcal/h | 41.280 | | | |
| | Btu/h | 163.776 | | | |
|  | G30/G31 | kg/h 3,79 | | | |
| | G20 | m³/h 5,08 | | | |
| | G25 | m³/h 5,91 | | | |
|  | Kg | 141 | | | |





macros 700

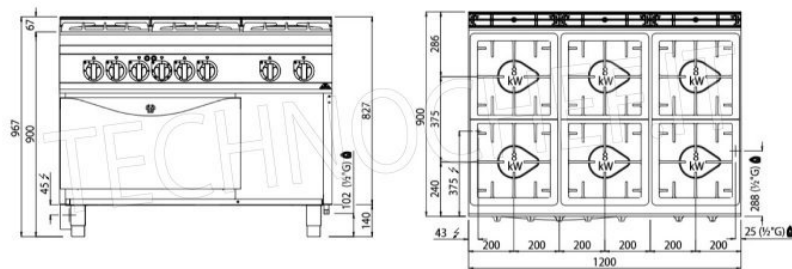

Macros 700

ECO POWER



3,5 kW



6 kW

15
models