



TECNOSERVICE'21 srl

by Tinti Sergio
Via Carlo Pisacane, 134
61032 Fano (PU) Italy
P.IVA IT0200411413

Tel. +39 0721 805911
FAX +39 0721 809794
e-mail: staff@technochef.it
www.technochef.it
www.technochef.eu

Services and Technologies for professional catering since 1973



CODE	DESCRIPTION	PRICE/DELIVERY
TCF375-000600	Armdadio Freezer-Freezer for Ice Cream, 1 Door, for 27 TRAYS of 5 lt, Professional, lt.650, Temp. -10°/ -22°C, Ventilated, ECOLOGICAL in Class D, Gas R290, V.230/1, Kw.1,00, Weight 150 Kg, dim.mm.810x715x2085h	
PROFESSIONAL DESCRIPTION		

FREEZER-FREEZER CABINET 1 Door, lt.650, Temp.-10°/-22°C, ECOLOGICAL in Class D, ICE Line :

- The Ice cabinet was born from the need to **store ice cream , semifreddos , mousses and single portions** . Ice technology supports you every day to **always keep the quality of your homemade ice cream perfect** ;
- **Internal/external in AISI 304 stainless steel** ;
- External back, external bottom and internal technical compartment in galvanized/colaminated steel;
- Rounded internal corners for easy cleaning;
- **Racks and guides in AISI 304 stainless steel** ;
- **Handle in AISI 304 stainless steel** , thickness 2 mm;
- **1 self-closing door** with stop at 105°, hinges on the right;
- Triple chamber door gasket, magnetic, easily replaceable;
- **Maximum ice cream container capacity** :
 - **8 basins lt.7,1** (36x16,5x15 cm);
 - **27 bowls lt.5** (36x16.5x12 cm);
 - **22 basins lt.5,4** (36x25x8 cm);
 - **24 carapine lt. 7.3** (Ø20x25cm);
 - **48 tubs lt.3,9** (Ø20x12,5 cm);
- **Ventilated refrigeration** with indirect air flow;
- **Hot gas / electric defrost** (remote)
- **Automatic evaporation** of condensate;
- Monocoque structure with **75 mm insulation** - CFC/HCFC free;
- **Electronic control , flush panel display** ;
- Made with FSS technology - Fast Service System - for an easy and fast service;
- Single compartment for EN60x40 supports
- **LED lighting** ;
- **Lock with key** ;
- Adjustable **feet in AISI 304 stainless steel** h 100-150 mm.

TECHNICAL DATA :

- Gross capacity 573 l
- Temperature range -10°-22°C
- Plug-In refrigeration unit
- Energy efficiency class D
- Energy efficiency index: 59.5
- Annual consumption: 1794 kW/h annum
- Consumption 24h: 4.915 kW/h/24h
- Climate class: 5
- R290 ecological refrigerant gas
- Solenoid valve supplied as standard
- Absorbed power 1000 W
- Current consumption 4.6A
- Cooling capacity 692 W* (Evap. -30°C Cond. +55°C)
- Annual consumption 1794 kWh

Included :

- 8 pairs of guides for 60x40 cm grids
- 8 plasticized grids 60x40 cm

CE MARK
MADE IN ITALY

TECHNICAL CARD

power supply	Monofase
Volts	V 230/1
frequency (Hz)	50
motor power capacity (Kw)	1,00
gross weight (Kg)	150
breadth (mm)	810
depth (mm)	715
height (mm)	2085



Caratteristiche principali



Fondo modulare
Consente l'installazione su ruote, piedini, zoccolo fisso o mobile.



Isolamento 75 mm
Spessore isolamento 75 mm CFC/HCFC free.



Serratura e fermo porta
Porte autochiudenti reversibili con fermo a 105° dotate di serratura con chiave.



Guarnizioni sostituibili ad alta tenuta
Geometria a tripla camera con innovativa mescola D7, efficacia d'isolamento superiore del 35% rispetto alle tradizionali.




Versioni Plug-In o Remote
Motore a bordo o posizionamento remoto dell'unità condensante per un ambiente di lavoro fresco e silenzioso.



Doppia porta
L'installazione della doppia porta (optional) evita gli sbalzi termici e favorisce il mantenimento della temperatura.



Ventilatore Intelligente
I ventilatori si arrestano automaticamente all'apertura della porta per evitare l'aspirazione di aria calda dall'esterno.



Guide e cremagliere
Le cremagliere con foratura ad asola consentono un facile riposizionamento delle guide.




Tutto lo spazio che serve per conservare il gelato



Ice 650 l.

P armadio 715 mm
Griglia 60x40 cm




18 bacinelle 7,1 l. 27 bacinelle 5 l.
(36x16,5x15 cm) (36x16,5x12 cm)



22 bacinelle 5,4 l.
(36x25x8 cm)



24 carapine 7,3 l. 48 carapine 3,9 l.
(Ø20x25 cm) (Ø20x12,5 cm)

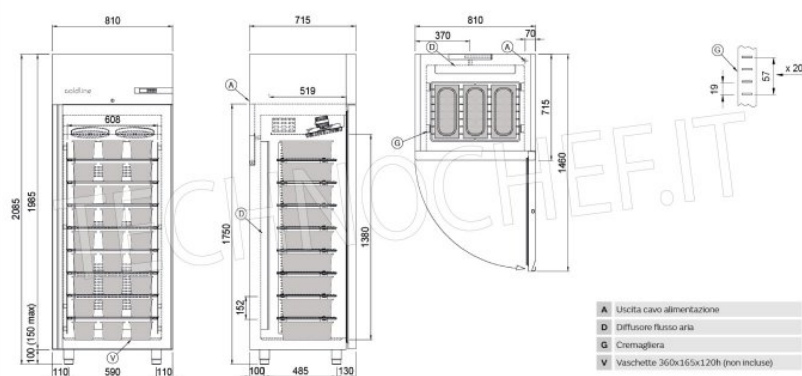

	Dimensioni	N°
	360x165x120 mm	27
Bacchetta	360x250x80 mm	22
	360x165x150 mm	18
Carapina	Ø 200x200x125 mm	48
	Ø 200x200x250 mm	24