



TECNOSERVICE'21 srl

by Tinti Sergio
Via Carlo Pisacane, 134
61032 Fano (PU) Italy
P.IVA IT0200411413

Tel. +39 0721 805911
FAX +39 0721 809794
e-mail: staff@technochef.it
www.technochef.it
www.technochef.eu

Services and Technologies for professional catering since 1973



CODE	DESCRIPTION	PRICE/DELIVERY
TCF375-000700	Armadio Freezer-Freezer for Ice Cream, 1 Door, for 54 TRAYS of 5 lt, Professional, lt.900, Temp.-10°/-22°C, Ventilated, ECOLOGICAL in Class D, Gas R290, V.230/1, Kw.1,00, Weight 180 Kg, dim.mm.810x1015x2085h	
PROFESSIONAL DESCRIPTION		

FREEZER-FREEZER CABINET For ICE CREAM, 1 Door, 900 l, Temp.-10°/-22°C, ECOLOGICAL in Class D, ICE Line :

- The Ice cabinet was born from the need to **store ice cream , semifreddos , mousses and single portions** . Ice technology supports you every day to **always keep the quality of your homemade ice cream perfect** ;
- **Internal/external in AISI 304 stainless steel** ;
- External back, external bottom and internal technical compartment in galvanized/colaminated steel;
- Rounded internal corners for easy cleaning;
- **Racks and guides in AISI 304 stainless steel** ;
- **Handle in AISI 304 stainless steel** , thickness 2 mm;
- **1 self-closing door** with stop at 105°, hinges on the right;
- Triple chamber door gasket, magnetic, easily replaceable;
- **Maximum ice cream container capacity** :
 - **36 basins lt.7,1** (36x16,5x15 cm);
 - **54 basins lt.5** (36x16,5x12 cm);
 - **44 basins lt.5,4** (36x25x8 cm);
 - **48 tubs lt. 7.3** (Ø20x25cm);
 - **96 tubs lt.3,9** (Ø20x12,5 cm);
- **Ventilated refrigeration** with indirect air flow;
- **Hot gas / electric defrost** (remote)
- **Automatic evaporation** of condensate;
- Monocoque structure with **75 mm insulation** - CFC/HCFC free;
- **Electronic control , flush panel display** ;
- Made with FSS technology - Fast Service System - for an easy and fast service;
- Single compartment for EN60x40 supports
- **LED lighting** ;
- **Lock with key** ;
- Adjustable **feet in AISI 304 stainless steel** h 100-150 mm.

TECHNICAL DATA :

- Gross capacity 872 l
- Temperature range -10°-22°C
- Plug-In refrigeration unit
- Energy efficiency class D
- Energy efficiency index: 64
- Annual consumption: 2916 kW/h annum
- Consumption 24h: 7.989 kW/h/24h
- Climate class: 5
- R290 ecological refrigerant gas
- Solenoid valve supplied as standard
- Absorbed power 1000 W
- Current consumption 4.6A
- Cooling capacity 692 W* (Evap. -30°C Cond. +55°C)
- Annual consumption 2916 kWh

Included :

- 8 pairs of guides for 60x80 cm grids
- 16 plasticized grids 60x40 cm

CE MARK
MADE IN ITALY

TECHNICAL CARD

power supply	Monofase
Volts	V 230/1
frequency (Hz)	50
motor power capacity (Kw)	1,18
gross weight (Kg)	180
breadth (mm)	810
depth (mm)	1015
height (mm)	2085



Caratteristiche principali



Fondo modulare

Consente l'installazione su ruote, piedini, zoccolo fisso o mobile.



Isolamento 75 mm

Spessore isolamento 75 mm CFC/HCFC free.



Serratura e fermo porta

Porte autochiudenti reversibili con fermo a 105° dotate di serratura con chiave.



Guarnizioni sostituibili ad alta tenuta

Geometria a tripla camera con innovativa mescola D7, efficacia d'isolamento superiore del 35% rispetto alle tradizionali.



Versioni Plug-In o Remote

Motore a bordo o posizionamento remoto dell'unità condensante per un ambiente di lavoro fresco e silenzioso.




Doppia porta

L'installazione della doppia porta (optional) evita gli sbalzi termici e favorisce il mantenimento della temperatura.



Ventilatore Intelligente

I ventilatori si arrestano automaticamente all'apertura della porta per evitare l'aspirazione di aria calda dall'esterno.



Guide e cremagliere

Le cremagliere con foratura ad asola consentono un facile riposizionamento delle guide.



Tutto lo spazio che serve per conservare il gelato




Ice 900 l.

P armadio 1015 mm
Griglia 60x80 cm




36 bacinelle 7,1 l. (36x16,5x15 cm) 54 bacinelle 5 l. (36x16,5x12 cm)



44 bacinelle 5,4 l. (36x25x8 cm)



48 carapine 7,3 l. (Ø20x25 cm) 96 carapine 3,9 l. (Ø20x12,5 cm)

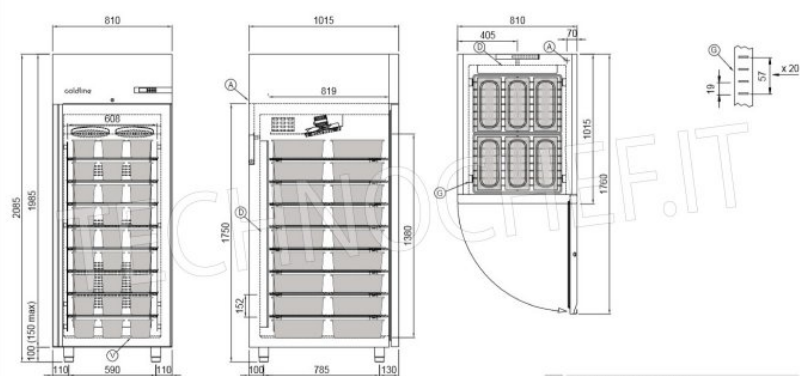

	Dimensioni	N°
Bacinella	360x165x120 mm	54
	360x250x80 mm	44
	360x165x150 mm	36
Carapina	Ø 200x200x125 mm	96
	Ø 200x200x250 mm	48

- A** Uscita cavo alimentazione
- D** Diffusore flusso aria
- G** Cremagliera
- V** Vaschette 360x165x120h (non incluse)