

TECNOSERVICE'21 srl

by Tinti Sergio Via Carlo Pisacane, 134 61032 Fano (PU) Italy P.IVA IT0200411413 Tel. +39 0721 805911 FAX +39 0721 809794 e-mail: staff@technochef.it www.technochef.it www.technochef.eu

Services and Technologies for professional catering since 1973 $\,$



CODE	DESCRIPTION	PRICE/DELIVERY		
FO-G-SNACK3200TN	3 DOOR Refrigerated Counter Table with upstand and neutral drawer, Professional, SNACK Line, temp2°/+8°C, capacity 339 litres, ventilated refrigeration, ECOLOGICAL in Class B, Gas R290, V.230/1, Kw. 0.26, weight 136 kg, dim.mm.1795x600x860/960h	Delivery from 4 to 9 days		
PROFESSIONAL DESCRIPTION				

3-DOOR REFRIGERATED TABLE with STAND and NEUTRAL DRAWER , SNACK line, capacity 339 litres , temperature -2°C /+8°C, ECOLOGICAL in Class B :

- AISI 304 stainless steel structure;
- bottom with rounded corners;
- stainless steel backrest, possibility of leaning against the wall;
- ventilated refrigeration;
- o capacity 339 litres;
- built-in refrigeration unit removable for easy maintenance;
- o circular flow of the cold air so as not to directly touch the product;
- o perating temperature -2°/+8°C;
- electronic temperature control with digital thermostat;
- electrical resistance around the door frame for elimination of condensation;
- automatic defrost with electric resistance and automatic temperature control defrost temperature;
- automatic evaporation of condensation water;
- o anti-corrosion treated evaporator;
- ECOLOGICAL Refrigerating Group with R290 Gas;
- Energy class B;
- maximum ambient temperature: +32°C;
- maximum temperature humidity: 55% HR;
- insulation thickness 60 mm;
- door with return spring:
- o door seal removable without tools;
- feet in AISI 304 stainless steel, adjustable in height;
- internal dimensions 1337x430x589h mm;
- external dimensions mm 1795x600x860/960h.

Supplied:

- o n.3 grids, dim.330x430mm
- o n.3 pairs of guides

Options/Accessories:

- chest of drawers with 2 drawers;
- chest of drawers with 3 drawers;
- o pair of guides for grid support;
- o plasticized grid;
- $\circ~$ kit of 4 wheels diameter 120 mm, 2 of which with brake.

NOTE:


IT IS RECOMMENDED TO INSTALL ONLY THE CHEST OF DRAWERS WITH 2 DRAWERS IN THE COMPARTMENT NEAR THE REFRIGERATING UNIT , so as not to obstruct the circulation of the cold.

CE MARK MADE IN ASIA

TECHNICAL CARD			
power supply	Monofase		
Volts	V 230/1		
frequency (Hz)	50		
motor power capacity (Kw)	0,26		
net weight (Kg)	136		
gross weight (Kg)	168		
breadth (mm)	1795		
depth (mm)	600		
height (mm)	960		
TECHNICAL CARD			

TEC	HNICAL	CARD

CODE/PICTURES	DESCRIPTION	PRICE/DELIVERY

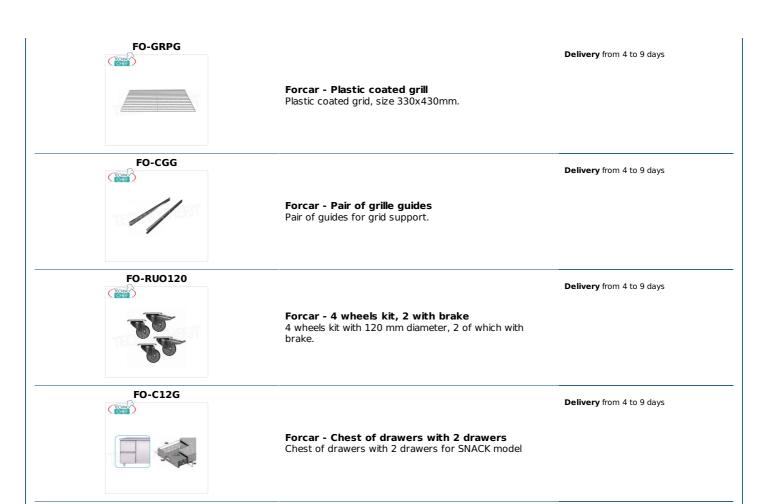

Delivery from 4 to 9 days

