



**TECNOSERVICE'21 srl**

by Tinti Sergio  
Via Carlo Pisacane, 134  
61032 Fano (PU) Italy  
P.IVA IT0200411413

Tel. +39 0721 805911  
FAX +39 0721 809794  
e-mail: [staff@technochef.it](mailto:staff@technochef.it)  
[www.technochef.it](http://www.technochef.it)  
[www.technochef.eu](http://www.technochef.eu)

Services and Technologies for professional catering since 1973



**Nota:** Vedi nell'immagine aggiuntiva i colori disponibili

PROFESSIONAL DESCRIPTION

WINE CELLAR-TECA, Capacity 60 Horizontal Bottles, STATIC or VENTILATED REFRIGERATION, suitable for WHITE or RED WINES, SLIM Line, 36 cm deep:

- aluminum structure,
- Interior in Aluminum,
- Sliding Doors, Sides and Top in GLASS,
- ECOLOGICAL Refrigerant Group with GAS R 600a
- digital thermoregulator from : +4°+16°C.
- automatic defrost,
- automatic evaporation of condensate,
- innovative refrigeration system based on the positioning of the cooling coil inside the refrigerated compartment behind the rear panel which guarantees better conservation conditions,
- SLIDING DOORS in glass on 1 FRONT,
- door anti-fog system;
- natural white LED lighting on the posts,
- key lock ,
- Anti-vibration system,
- Ambient temperature: +25°, MAX for WHITE WINES
- Ambient Temperature: +30°, MAX for RED WINES

4 POSSIBILITIES OF USE CONFIGURABLE by the Customer

- STATIC MULTITEMPERATURE from +6° to +16°C for WHITE and RED Wines ,
- STATIC MULTITEMPERATURE from +14° to +20°C for RED Wines ,
- VENTILATED for RED Wines with adjustable temperature from +14° to + 16°C ,
- VENTILATED for WHITE Wines with adjustable temperature from +6° to + 12°C ;

Possible EQUIPMENTS, to be Selected at the TIME of the Order in the PRODUCT SHEET.

- FRAME in MDF

RAW, - MATT WHITE RAL-9010, - MATT BLACK RAL-9005, - GOLD VO1, SILVER VO2, - COLORS RAL 20 MATT LACQUERED, COLORS RAL 100 GLOSSY LACQUERED

DUNE FRAMES

RAW, - MATT WHITE RAL9010, - MATT BLACK RAL9005, - GOLD VO1 - SILVER VO2, - COLORS RAL20 MATT LACQUERED, COLORS RAL100 GLOSSY LACQUERED ;

OPTIONALS/ACCESSORIES:

- Colored LED lighting on the uprights with remote control .

CE mark

Made in Italy

TECHNICAL CARD

power supply	Monofase
Volts	V 230/1
frequency (Hz)	50
motor power capacity (Kw)	0,165
net weight (Kg)	97
breadth (mm)	860
depth (mm)	362
height (mm)	1852

AVAILABLE MODELS

EO-TV-H10-M01



WINE CASE, 60 Bottles, Doors on 1 Front, 3 Glass Sides, SLIM Line, 36 cm Depth, Version with RAW MDF WOOD FRAME

WINE CASE with FRAME FRAME in RAW MDF WOOD, 3 GLASS SIDES, HORIZONTAL cap.60 bottles, STATIC or VENTILATED cold, temp.+4°/+16°C, for WHITE or RED WINES, doors on 1 front, V .230/1, Kw.0,165, Weight 97 Kg, dim.mm.860x362x1852h

Delivery from 10 to 18 days

**EO-TV-H10-RAL9010**
**WINE CASE, 60 Bottles, Doors on 1 Front, 3 Glass Sides, SLIM Line, 36 cm Depth, Version with MATT WHITE WOODEN FRAME**

WINE CASE with FRAME FRAME in MATT WHITE WOOD, 3 GLASS SIDES, HORIZONTAL cap.60 bottles, STATIC or VENTILATED cold, temp.+4°/+16°C, for WHITE or RED WINES, doors on 1 front, V .230/1, Kw.0,165, Weight 97 Kg, dim.mm.860x362x1852h

**Delivery** from 10 to 18 days

**EO-TV-H10-RAL9005**
**WINE CASE, 60 Bottles, Doors on 1 Front, 3 Glass Sides, SLIM Line, 36 cm deep, Version with WOODEN FRAME in MATT BLACK color**

WINE CABINET with FRAME in MATT BLACK WOOD, 3 GLASS SIDES, HORIZONTAL cap.60 bottles, STATIC or VENTILATED cold, temp.+4°/+16°C, for WHITE or RED WINES, doors on 1 front, V.230/1, Kw.0,165, Weight 97 Kg, dim.mm.860x362x1852h

**Delivery** from 10 to 18 days

**EO-TV-H10-RAL20**
**WINE CASE, 60 Bottles, Doors on 1 Front, 3 Glass Sides, SLIM Line, 36 cm deep, Version with WOODEN FRAME in RAL20 colors**

WINE CABINET with WOODEN FRAME in RAL20 colours, 3 GLASS SIDES, HORIZONTAL cap.60 bottles, STATIC or VENTILATED cold, temp.+4°/+16°C, for WHITE or RED WINES, doors on 1 front, V.230/1, Kw.0,165, Weight 97 Kg, dim.mm.860x362x1852h

**Delivery** from 10 to 18 days

**EO-TV-H10-RAL100**
**WINE CASE, 60 Bottles, Doors on 1 Front, 3 Glass Sides, SLIM Line, 36 cm deep, Version with WOODEN FRAME in RAL100 colors**

WINE CABINET with WOODEN FRAME in RAL100 colours, 3 GLASS SIDES, HORIZONTAL cap.60 bottles, STATIC or VENTILATED cold, temp.+4°/+16°C, for WHITE or RED WINES, doors on 1 front, V.230/1, Kw.0,165, Weight 97 Kg, dim.mm.860x362x1852h

**Delivery** from 10 to 18 days

**EO-TV-H10-V01**
**WINE CASE, 60 Bottles, Doors on 1 Front, 3 Glass Sides, SLIM Line, 36 cm deep, Version with GOLD painted WOODEN FRAME**

WINE CASE with GOLD painted WOODEN FRAME, 3 GLASS SIDES, HORIZONTAL cap.60 bottles, STATIC or VENTILATED cold, temp.+4°/+16°C, for WHITE or RED WINES, doors on 1 front, V .230/1, Kw.0,165, Weight 97 Kg, dim.mm.860x362x1852h

**Delivery** from 10 to 18 days

**EO-TV-H10-V02**
**WINE CASE, 60 Bottles, Doors on 1 Front, 3 Glass Sides, SLIM Line, 36 cm deep, Version with SILVER painted WOODEN FRAME**

WINE CABINET with SILVER painted WOODEN FRAME, 3 GLASS SIDES, HORIZONTAL cap.60 bottles, STATIC or VENTILATED cold, temp.+4°/+16°C, for WHITE or RED WINES, doors on 1 front, V .230/1, Kw.0,165, Weight 97 Kg, dim.mm.860x362x1852h

**Delivery** from 10 to 18 days

**EO-TV-H10-D01**
**WINE CASE, 60 Bottles, Doors on 1 Front, 3 Glass Sides, SLIM Line, 36 cm Depth, Version with DUNE FRAME in RAW WOOD**

WINE CASE with DUNE FRAME FRAME in RAW WOOD, 3 GLASS SIDES, HORIZONTAL cap.60 bottles, STATIC or VENTILATED cold, temp.+4°/+16°C, for WHITE or RED WINES, doors on 1 front, V .230/1, Kw.0,165, Weight 97 Kg, dim.mm.860x362x1852h

**Delivery** from 10 to 18 days

**EO-TV-H10-DV02**
**WINE CASE, 60 Bottles, Doors on 1 Front, 3 Glass Sides, SLIM Line, 36 cm deep, Version with SILVER painted DUNE WOODEN FRAME**

WINE CABINET with SILVER DUNE WOODEN FRAME, 3 GLASS SIDES, HORIZONTAL cap.60 bottles, STATIC or VENTILATED Cold, temp.+4°/+16°C, for WHITE or RED WINES, doors on 1 front, V .230/1, Kw.0,165, Weight 97 Kg, dim.mm.860x362x1852h

**Delivery** from 10 to 18 days

**EO-TV-H10-DV01**
**WINE CASE, 60 Bottles, Doors on 1 Front, 3 Glass Sides, SLIM Line, 36 cm deep, Version with DUNE FRAME in GOLD painted WOOD**

WINE CABINET with DUNE FRAME in GOLD WOOD, 3 GLASS SIDES, HORIZONTAL cap.60 bottles, STATIC or VENTILATED cold, temp.+4°/+16°C, for WHITE or RED WINES, doors on 1 front, V.230/1, Kw.0,165, Weight 97 Kg, dim.mm.860x362x1852h

**Delivery** from 10 to 18 days

**EO-TV-H10-DRAL9010**
**WINE CASE, 60 Bottles, Doors on 1 Front, 3 Glass Sides, SLIM Line, 36 cm deep, Version with DUNE WOODEN FRAME in WHITE color**

WINE CASE with DUNE FRAME FRAME in WHITE WOOD, 3 GLASS SIDES, HORIZONTAL cap.60 bottles, STATIC or VENTILATED cold, temp.+4°/+16°C, for WHITE or RED WINES, doors on 1 front, V.230/1, Kw.0,165, Weight 97 Kg, dim.mm.860x362x1852h

**Delivery** from 10 to 18 days

**EO-TV-H10-DRAL9005**
**WINE CASE, 60 Bottles, Doors on 1 Front, 3 Glass Sides, SLIM Line, 36 cm deep, Version with DUNE WOODEN FRAME in BLACK color**

WINE CABINET with DUNE FRAME in BLACK WOOD, 3 GLASS SIDES, HORIZONTAL cap.60 bottles, STATIC or VENTILATED cold, temp.+4°/+16°C, for WHITE or RED WINES, doors on 1 front, V.230/1, Kw.0,165, Weight 97 Kg, dim.mm.860x362x1852h

**Delivery** from 10 to 18 days

**EO-TV-H10-DRAL20**
**WINE CASE, 60 Bottles, Doors on 1 Front, 3 Glass Sides, SLIM Line, 36 cm deep, Version with WOODEN DUNE FRAME in RAL20 colors**

WINE CABINET with DUNE FRAME in WOOD in RAL20 colours, 3 GLASS SIDES, HORIZONTAL cap.60 bottles, STATIC or VENTILATED cold, temp.+4°/+16°C, for WHITE or RED WINES, doors on 1 front, V.230/1, Kw.0,165, Weight 97 Kg, dim.mm.860x362x1852h

**Delivery** from 10 to 18 days

**EO-TV-H10-DRAL100**
**WINE CASE, 60 Bottles, Doors on 1 Front, 3 Glass Sides, SLIM Line, 36 cm deep, Version with DUNE WOODEN FRAME in RAL100 colors**


WINE CABINET with DUNE FRAME FRAME in WOOD in RAL100 colours, 3 GLASS SIDES, HORIZONTAL cap.60 bottles, STATIC or VENTILATED cold, temp. +4°/+16°C, for WHITE or RED WINES, doors on 1 front, V.230/1, Kw.0,165, Weight 97 Kg, dim.mm.860x362x1852h

**Delivery** from 10 to 18 days

**TECHNICAL CARD****CODE/PICTURES****DESCRIPTION****PRICE/DELIVERY****EO-OPT-RGB-A**
**Colored LED lighting with remote control**

Colored LED lighting with remote control, dim.mm.40x1600

**Delivery** from 4 to 9 days

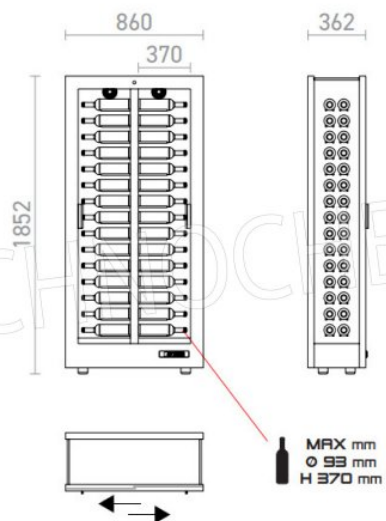

TV-H10 / TE-H10

T1-H-\*



T1-H\*

MDF non verniciato • Unfinished MDF • MDF non peint Dune non verniciato • Dune unfinished • Dune non peinte



MDF 1  
MDF non verniciato  
unfinished MDF  
MDF non peint



Dune 1  
Dune non verniciato  
Dune unfinished  
Dune non peinte

Verniciatura a liquido • Liquid paint finish • Laquage par peinture liquide



RAL 9010  
bianco opaco (20 gloss)  
matte white (20 gloss)  
blanc mat (20 gloss)



RAL 9005  
nero opaco (20 gloss)  
matte black (20 gloss)  
noir mat (20 gloss)



V01  
verniciato oro  
gold paint  
peinture or



V02  
verniciato argento  
silver paint  
peinture argent



RAL  
nero 20 gloss - lucido 180 gloss  
matte 20 gloss - glossy 180 gloss  
mat 20 gloss - brillant 180 gloss

Verniciatura a liquido (Dune) • Liquid paint finish (Dune) • Laquage par peinture liquide (Dune)



RAL 9010  
bianco opaco (20 gloss)  
matte white (20 gloss)  
blanc mat (20 gloss)



RAL 9005  
nero opaco (20 gloss)  
matte black (20 gloss)  
noir mat (20 gloss)



V01  
verniciato oro  
gold paint  
peinture or



V02  
verniciato argento  
silver paint  
peinture argent



RAL  
nero 20 gloss - lucido 180 gloss  
matte 20 gloss - glossy 180 gloss  
mat 20 gloss - brillant 180 gloss

Rivestimento in foglia (Dune) • Leaf finish (Dune) • Revêtement en feuille métallique (Dune)




DFO1  
oro patinato  
gold coated  
revêtement or



DFO2  
argento patinato  
silver coated  
revêtement argent

POSSIBILI IMPOSTAZIONI • POSSIBLE SETTINGS • CHOIX DE RÉGLAGE

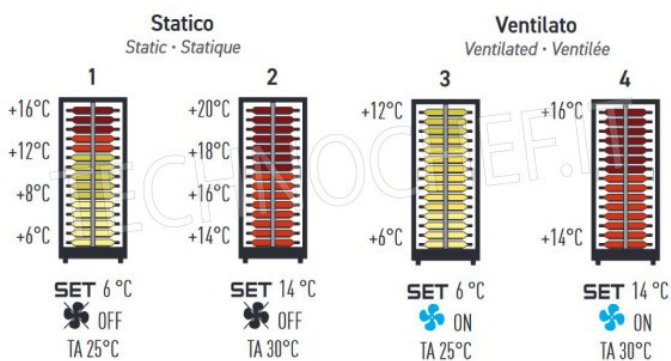

Le temperature riportate sono indicative e possono variare di  $\pm 2$  °C. L'utente può impostare la temperatura da +4 °C a +18 °C.  
Reported temperatures are approximate and may vary by  $\pm 2$  °C. User-controlled temperature +4 °C to +18 °C.  
Les températures indiquées sont approximatives et peuvent varier de  $\pm 2$  °C. L'utilisateur peut régler la température de +4 °C à +18 °C.



UNITÀ REFRIGERANTE INTEGRATA • SELF-CONTAINED REFRIGERATING UNIT • UNITÉ RÉFRIGÉRANTE INTÉGRÉE

IMPIANTO A REFRIGERAZIONE POSTERIORE - CONDENSAZIONE STATICA  
REAR COOLING SYSTEM - STATIC CONDENSATION  
SYSTÈME DE RÉFRIGÉRATION ARRIÈRE - CONDENSATION STATIQUE



La serpentina di raffreddamento ❶ e le ventole di aereazione interna ❷ sono posizionate all'interno del vano refrigerato dietro il pannello posteriore in alluminio. Il compressore ad inverter ❸ e la vasca per l'evaporazione della condensa ❹ sono inseriti nella base inferiore. Il condensatore statico ❺ è installato nel retro della vetrina. Il raffreddamento del condensatore avviene per convezione senza l'ausilio di ventole. L'aria ambiente passa sotto la base e sale nello spazio tra il retro della vetrina ed il muro, si scalda ed esce dall'alto.

The cooling coil ❶ and the internal aeration fans ❷ are placed inside the refrigerated compartment, behind the aluminum back panel. The inverter compressor ❸ and the evaporation pan ❹ are placed in the lower base. The static condenser ❺ is installed in the back of the cabinet. The condenser cools down due to convection without the use of fans. Ambient air comes through under the base and rises in the gap between the back of the cabinet and the wall, gets warm and exits from the top.

Le serpentin de refroidissement ❶ et les ventilateurs internes ❷ sont positionnés à l'intérieur du compartiment réfrigéré derrière le panneau du fond en aluminium. Le compresseur onduleur inverter ❸ et le réservoir d'évaporateur de condense ❹ sont insérés dans la base inférieure. Le condensateur statique ❺ est installé à l'arrière de la vitrine. Le refroidissement du condenseur se fait par convection sans l'aide de ventilateurs. L'air passe sous la base et s'élève dans l'espace entre l'arrière de la vitrine et le mur, il se réchauffe et s'échappe vers l'haut.



IMPOSTAZIONE TERMOREGOLATORE • TEMPERATURE CONTROLLER SETTING • RÉGLAGE CONTROLLEUR DE TEMPÉRATURE



- ⏻ Accende e spegne lo strumento • Turn on and off the appliance • Allume et éteint l'appareil
- 💡 Accende e spegne la luce • Turn on and off the light • Allume et éteint l'éclairage
- SET Per visualizzare/modificare Set point • View/change the set point • Pour afficher/changer le point de consigne
- ❄️ Per avviare sbrinamento manuale • Start the manual defrost cycle • Pour lancer le dégivrage manuel
- ⬇️ Per diminuire la temperatura • Decrease the temperature • Pour diminuer la température
- ⬆️ Per aumentare la temperatura • Raise temperature • Pour augmenter la température
- RUX Per attivare resistenza guide • Switch on rails heating • Pour activer le rechauffage du cadre des rails
- 🌀 Per attivare ventole interne • Switch on inside fans • Pour activer les ventilateurs intérieurs