



TECNOSERVICE'21 srl

by Tinti Sergio
Via Carlo Pisacane, 134
61032 Fano (PU) Italy
P.IVA IT0200411413

Tel. +39 0721 805911
FAX +39 0721 809794
e-mail: staff@technochef.it
www.technochef.it
www.technochef.eu

Services and Technologies for professional catering since 1973



TECHNOCHEF.IT

Nota: Vedi nell'immagine aggiuntiva i colori disponibili

PROFESSIONAL DESCRIPTION

WINE CELLAR-TECA, Capacity 120 Horizontal Bottles, STATIC or VENTILATED REFRIGERATION, suitable for WHITE or RED WINES:

- **aluminum structure,**
- Interior in Aluminum,
- Sliding Doors, Sides and Top **in GLASS,**
- **ECOLOGICAL** Refrigerant **Group** with GAS R 290a
- **digital thermoregulator** from : **+4°+16°C.**
- **automatic defrost,**
- **automatic evaporation of condensate,**
- **innovative refrigeration system based on the positioning of the cooling coil in the center of the showcase which guarantees better conservation conditions,**
- **SLIDING DOORS** in glass on **2 FRONTS,**
- **door anti-fog system;**
- **natural white LED lighting on the posts,**
- **key lock ,**
- **Anti-vibration system,**
- **Ambient temperature: +25°, MAX for WHITE WINES**
- **Ambient Temperature: +30°, MAX for RED WINES**

4 POSSIBILITIES OF USE CONFIGURABLE by the Customer

- STATIC MULTITEMPERATURE from +6° to +16°C for WHITE and RED Wines,
- STATIC MULTITEMPERATURE from +14° to +20°C for RED Wines,
- VENTILATED for RED Wines with adjustable temperature from +14° to +16°C,
- VENTILATED for WHITE Wines with adjustable temperature from +6° to + 12°C;

Possible EQUIPMENTS, to be Selected at the TIME of the Order in the PRODUCT SHEET.

- FRAME in MDF
RAW, - MATT WHITE RAL-9010, - MATT BLACK RAL-9005, - GOLD VO1, SILVER VO2, - COLORS RAL 20 MATT LACQUERED, COLORS RAL 100 GLOSSY LACQUERED

DUNE FRAMES
RAW, - MATT WHITE RAL9010, - MATT BLACK RAL9005, - GOLD VO1 - SILVER VO2 - COLORS RAL20 MATT LACQUERED, COLORS RAL100 GLOSSY LACQUERED ;

OPTIONALS/ACCESSORIES:

- **Colored LED lighting** on the uprights with **remote control .**

CE mark
Made in Italy

TECHNICAL CARD

power supply	Monofase
Volts	V 230/1
frequency (Hz)	50
net weight (Kg)	120
breadth (mm)	860
depth (mm)	530
height (mm)	1890

AVAILABLE MODELS

EO-TV-C10-M01



CASE for WINE, 120 Bottles, Doors on 2 Fronts, 4 Glass Sides, Version with RAW MDF WOOD FRAME
WINE CABINET with FRAME FRAME in RAW MDF WOOD, with GLASSES ON ALL SIDES, capacity 120 HORIZONTAL bottles, STATIC or VENTILATED cold, temp +4°/+16°C, for WHITE or RED WINES, doors on 2 fronts ,V.230/1, Kw.0,424, Weight 120 Kg, dim.mm.860x530x1893h

Delivery from 10 to 18 days

EO-TV-C10-RAL9010



WINE CASE, 120 Bottles, Doors on 2 Fronts, 4 Glass Sides, Version with MATT WHITE WOODEN FRAME
WINE CASE with FRAME FRAME in MATT WHITE WOOD, GLASSES ON ALL SIDES, capacity 120 HORIZONTAL bottles, STATIC or VENTILATED cold, temp. +4°/+16°C, for WHITE or RED WINES, doors on 2 fronts ,V.230/1, Kw.0,424,Weight 120 Kg,dim.mm.860x530x1893h

Delivery from 10 to 18 days

EO-TV-C10-RAL9005
CASE for WINE, 120 Bottles, Doors on 2 Fronts, 4 Glass Sides, Version with WOODEN FRAME in MATT BLACK color

WINE CABINET with FRAME in MATT BLACK WOOD, GLASSES ON ALL SIDES, cap.120 HORIZONTAL bottles, STATIC or VENTILATED cold, temp.+4°/+16°C, for WHITE or RED WINES, doors on 2 fronts , V.230/1, Kw.0,424, Weight 120 Kg, dim.mm.860x530x1893h

Delivery from 10 to 18 days

EO-TV-C10-V01
CASE for WINE, 120 Bottles, Doors on 2 Fronts, 4 Glass Sides, Version with GOLD painted WOODEN FRAME

WINE CABINET with WOODEN FRAME painted GOLD, GLASSES ON ALL SIDES, HORIZONTAL capacity 120 bottles, STATIC or VENTILATED cold, temp. +4°/+16°C, for WHITE or RED WINES, doors on 2 fronts ,V.230/1, Kw.0,424,Weight 120 Kg,dim.mm.860x530x1893h

Delivery from 10 to 18 days

EO-TV-C10-V02
CASE for WINE, 120 Bottles, Doors on 2 Fronts, 4 Glass Sides, Version with SILVER painted WOODEN FRAME

WINE CASE with SILVER painted WOODEN FRAME, GLASSES ON ALL SIDES, HORIZONTAL capacity 120 bottles, STATIC or VENTILATED cold, temp. +4°/+16°C, for WHITE or RED WINES, doors on 2 fronts, V.230/1,Kw.0,424,Weight 120 Kg,dim.mm.860x530x1893h

Delivery from 10 to 18 days

EO-TV-C10-RAL20
CASE for WINE, 120 Bottles, Doors on 2 Fronts, 4 Glass Sides, Version with WOODEN FRAME in RAL20 colors - matt 20 Gloss

WINE CABINET with WOODEN FRAME in RAL20 colours, GLASSES ON ALL SIDES, cap.120 HORIZONTAL bottles, STATIC or VENTILATED cold, temp.4°/+16°C, for WHITE or RED WINES, doors on 2 fronts, V.230/1, Kw.0,424, Weight 120 Kg, dim.mm.860x530x1893h

Delivery from 10 to 18 days

EO-TV-C10-RAL100
WINE CASE, 120 Bottles, Doors on 2 Fronts, 4 Glass Sides, Version with WOODEN FRAME in RAL100 colors

WINE CABINET with WOODEN FRAME in RAL100 colours, GLASSES ON ALL SIDES, cap.120 HORIZONTAL bottles, STATIC or VENTILATED cold, temp. +4°/+16°C, for WHITE or RED WINES, doors on 2 fronts, V.230/1, Kw.0,424, Weight 120 Kg, dim.mm.860x530x1893h

Delivery from 10 to 18 days

EO-TV-C10-D01
CASE for WINE, 120 Bottles, Doors on 2 Fronts, 4 Glass Sides, Version with DUNE FRAME in RAW WOOD

WINE CASE with DUNE FRAME FRAME in RAW WOOD, with GLASSES ON ALL SIDES, cap.120 HORIZONTAL bottles, STATIC or VENTILATED cold, temp. +4°/+16°C, for WHITE or RED WINES, doors on 2 fronts ,V.230/1, Kw.0,424, Weight 120 Kg, dim.mm.860x530x1893h

Delivery from 10 to 18 days

EO-TV-C10-DV02
CASE for WINE, 120 Bottles, Doors on 2 Fronts, 4 Glass Sides, Version with DUNE FRAME in SILVER painted WOOD

WINE CASE with DUNE FRAME FRAME in SILVER WOOD, GLASSES ON ALL SIDES, cap.120 HORIZONTAL bottles, STATIC or VENTILATED cold, temp. +4°/+16°C, for WHITE or RED WINES, doors on 2 fronts ,V.230/1,Kw.0,424, Weight 120 Kg,dim.mm.860x530x1893h

Delivery from 10 to 18 days

EO-TV-C10-DRAL9010
WINE CASE, 120 Bottles, Doors on 2 Fronts, 4 Glass Sides, Version with DUNE FRAME in MATT WHITE WOOD

WINE CASE with DUNE FRAME in MATT WHITE WOOD, GLASSES ON ALL SIDES, HORIZONTAL capacity 120 bottles, STATIC or VENTILATED cold, temp.+4°/+16°C, for WHITE or RED WINES, doors on 2 fronts, V230/1,Kw.0,424,Weight 120 Kg,dim.mm860x530x1893h

Delivery from 10 to 18 days

EO-TV-C10-DRAL9005
WINE CASE, 120 Bottles, Doors on 2 Fronts, 4 Glass Sides, Version with DUNE FRAME in MATT BLACK WOOD

WINE CABINET with DUNE FRAME in MATT BLACK WOOD, GLASSES ON ALL SIDES, HORIZONTAL cap.120 bottles, STATIC or VENTILATED cold, temp.+4°/+16°C, for WHITE or RED WINES, doors on 2 fronts, V.230/1, Kw.0,424, Weight 120 Kg, dim.mm.860x530x1893h

Delivery from 10 to 18 days

EO-TV-C10-DV01
WINE CASE, 120 Bottles, Doors on 2 Fronts, 4 Glass Sides, Version with DUNE FRAME in GOLD painted WOOD

WINE CASE with DUNE FRAME in GOLD painted WOOD, GLASSES ON ALL SIDES, HORIZONTAL capacity 120 bottles, STATIC or VENTILATED cold, temp.+4°/+16°C, for WHITE or RED WINES, doors on 2 fronts, V.230/1, Kw.0,424, Weight 120 Kg, dim.mm.860x530x1893h

Delivery from 10 to 18 days

EO-TV-C10-DRAL20
WINE CASE, 120 Bottles, Doors on 2 Fronts, 4 Glass Sides, Version with DUNE WOODEN FRAME in RAL20 colors

WINE CABINET with DUNE FRAME in RAL20 colours, GLASSES ON ALL SIDES, HORIZONTAL cap.120 bottles, STATIC or VENTILATED cold, temp.+4°/+16°C, for WHITE or RED WINES, doors on 2 fronts, V.230/1, Kw.0,424, Weight 120 Kg, dim.mm.860x530x1893h

Delivery from 10 to 18 days

EO-TV-C10-DRAL100
WINE CASE, 120 Bottles, Doors on 2 Fronts, 4 Glass Sides, Version with DUNE WOODEN FRAME in RAL100 colors


WINE CASE with DUNE FRAME in RAL100 colours, GLASSES ON ALL SIDES, HORIZONTAL cap.120 bottles, STATIC or VENTILATED cold, temp.+4°/+16°C, for WHITE or RED WINES, doors on 2 fronts, V.230/1, Kw.0,424, Weight 120 Kg, dim.mm.860x530x1893h

Delivery from 10 to 18 days

TECHNICAL CARD**CODE/PICTURES****DESCRIPTION****PRICE/DELIVERY****EO-OPT-RGB-A**
Colored LED lighting with remote control

Colored LED lighting with remote control, dim.mm.40x1600

Delivery from 4 to 9 days

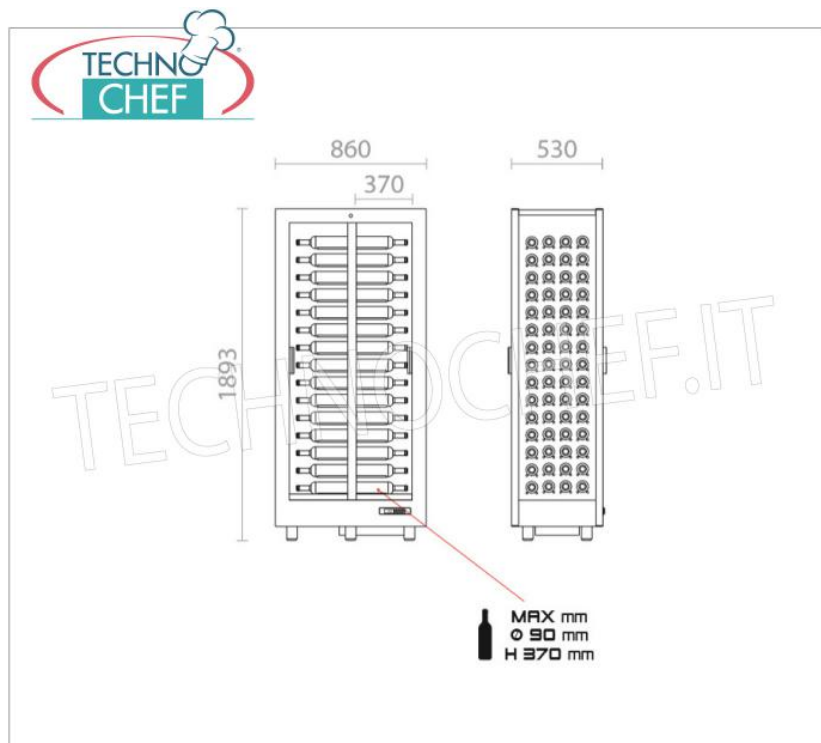



+



TV-C10 / TE-C10

T1-C-*



COLORI CORNICE • FRAMES COLOURS • COULEURS DU CADRE



T1-C-*

MDF non verniciato • Unfinished MDF • MDF non peinte | Dune non verniciato • Dune unfinished • Dune non peinte



MDF 1

MDF non verniciato
unfinished MDF
MDF non peinte



Dune 1

Dune non verniciato
Dune unfinished
Dune non peinte

Verniciatura a liquido • Liquid paint finish • Laquage par peinture liquide



RAL 9010

bianco opaco (20 gloss)
matte white (20 gloss)
blanc mat (20 gloss)



RAL 9005

nero opaco (20 gloss)
matte black (20 gloss)
noir mat (20 gloss)



VD1

verniciato oro
gold paint
peinture or



VD2

verniciato argento
silver paint
peinture argent



RAL

speco 20 gloss - lucido 100 gloss
mirror 20 gloss - glossy 100 gloss
miroir 20 gloss - brillant 100 gloss

Verniciatura a liquido (Dune) • Liquid paint finish (Dune) • Laquage par peinture liquide (Dune)



DRAL 9010

bianco opaco (20 gloss)
matte white (20 gloss)
blanc mat (20 gloss)



DRAL 9005

nero opaco (20 gloss)
matte black (20 gloss)
noir mat (20 gloss)



DVD1

verniciato oro
gold paint
peinture or



DVD2

verniciato argento
silver paint
peinture argent



DRAL

speco 20 gloss - lucido 100 gloss
mirror 20 gloss - glossy 100 gloss
miroir 20 gloss - brillant 100 gloss

Rivestimento in foglia (Dune) • Leaf finish (Dune) • Revêtement en feuille métallique (Dune)



DFD1

oro patinato
gold coated
revêtement or




DFD2

argento patinato
silver coated
revêtement argent



POSSIBILI IMPOSTAZIONI • POSSIBLE SETTINGS • CHOIX DE RÉGLAGE

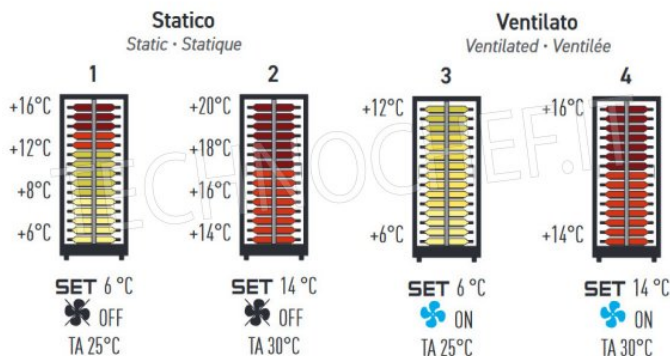


Le temperature riportate sono indicative e possono variare di (+ -) 2 °C. L'utente può impostare la temperatura da +4 °C a +18 °C.
Reported temperatures are approximate and may vary by (+ -) 2 °C. User-controlled temperature +4 °C to +18 °C.
Les températures indiquées sont approximatives et peuvent varier de (+ -) 2 °C. L'utilisateur peut régler la température de +4 °C à +18 °C.



UNITÀ REFRIGERANTE INTEGRATA • SELF-CONTAINED REFRIGERATING UNIT • UNITÉ RÉFRIGÉRANTE INTÉGRÉE

IMPIANTO A REFRIGERAZIONE CENTRALE (brevettato) • CENTRAL COOLING SYSTEM (patented) • INSTALLATION DE RÉFRIGÉRATION CENTRALE (brevetée)

STANDARD









La serpentina di raffreddamento ① e le ventole di aerazione interna ② sono inserite al centro della vetrina all'interno dei pannelli di alluminio. Il compressore ③, il condensatore orizzontale con ventola a pala premonte ④ e la vasca per l'evaporazione della condensa ⑤ sono inseriti in una speciale vasca ribassata. Con questa soluzione, pur installando un compressore standard, l'altezza della base è limitata (150 mm) in quanto viene utilizzato lo spazio inferiore dove sono inseriti i piedi (40 mm). La circolazione dell'aria di condensazione avviene dalla parte inferiore frontale.

The cooling coil ① and the internal fans ② are installed in the middle of the cabinet inside the aluminium panels. The compressor ③, the horizontal condensing unit, the pushing fan ④ and the vat for the evaporation of the condensation water ⑤ are placed in a special lowered tank. With this solution, despite installing a standard compressor, the height of the base is limited (150 mm) as it takes up the lower space where feet are located (40 mm). Condensation air circulates from the bottom front part.

Le serpentin de refroidissement ① et les ventilateurs internes ② sont insérés au milieu de la vitrine à l'intérieur des panneaux d'aluminium. Le compresseur ③, l'unité de condensation horizontale, le ventilateur avec la lame à pression ④ et le bassin de l'évaporation de l'eau de condensation ⑤ sont placés dans une cuve spéciale rébaissée. Avec cette solution, même avec un compresseur standard, la hauteur de la base est limitée (150 mm), car on utilise l'espace inférieur où se trouvent les pieds (40 mm). La circulation de l'air de condensation est soufflée à travers la partie inférieure avant.

	circolazione aria interna • inside air flow • circulation de l'air interne
	aspirazione aria ambiente • cold air suction • aspiration de l'air ambiant
	espulsione aria calda • warm air outlet • expulsion de l'air chaud



-  Accende e spegne lo strumento • Turn on and off the appliance • Allume et éteint l'appareil
-  Accende e spegne la luce • Turn on and off the light • Allume et éteint l'éclairage
- SET** Per visualizzare/modificare Set point • View/change the set point • Pour afficher/changer le point de consigne
-  Per avviare sbrinatorio manuale • Start the manual defrost cycle • Pour lancer le dégivrage manuel
-  Per diminuire la temperatura • Decrease the temperature • Pour diminuer la température
-  Per aumentare la temperatura • Raise temperature • Pour augmenter la température
- AUX** Per attivare resistenza guide • Switch on rails heating • Pour activer le rechauffage du cadre des rails
-  Per attivare ventole interne • Switch on inside fans • Pour activer les ventilateurs intérieurs





