

TECNOSERVICE'21 srl by Tinti Sergio Via Carlo Pisacane, 134 61032 Fano (PU) Italy P.IVA IT0200411413 Tel. +39 0721 805911 FAX +39 0721 809794 e-mail: staff@technochef.it www.technochef.it www.technochef.eu

Services and Technologies for professional catering since 1973



PROFESSIONAL DESCRIPTION

BOXED CENTRIFUGAL VACUUM CLEANERS with STAINLESS STEEL PANELS, TRANSMISSION version with BELTS and PULLEYS, 2 SPEEDS, COMPLETE RANGE with max flow rate from 2.000/1338 to 15.000/10034 m/cubic/hour:

• double intake centrifugal boxed fan with motor directly coupled to the impeller (forward blades), by means of pulleys and belts ;

- centrifugal fan built with sturdy hot-dip galvanized steel and mounted on rubber cushioned feet;
- 2 speeds ;
- aluminum profile frame ;
- $\circ\,$ self-extinguishing sandwich paneling in galvanized steel on the inside and stainless steel on the outside ;

• double panel.

CE mark Made in Italy

	AVAILABLE MODELS			
TCF475-000310	2-speed boxed centrifugal aspirators, max flow rate 2000/1317 m³/h, V.380/3	€ 1.054,22 VAT escluded Shipping to be calculed		
	BOXED ASPIRATOR with TRANSMISSION CENTRIFUGAL FAN with BELTS and PULLEYS, STAINLESS STEEL panels, 2 SPEEDS, max flow rate 2.000/1317 m/cubic/hour, revolutions 1440/948, db 65/52, V.380/3, Kw.0, 55/0.18, weight 40 kg, dim.mm.800x600x600h	Delivery from 8 to 15 days		
TCF475-000320		€ 1.096,16		
TCF475-000320	2-speed boxed centrifugal aspirators, max flow rate 2500/1673 m²/h, V.380/3 BOXED ASPIRATOR with TRANSMISSION CENTRIFUGAL	€ 1.096,16 VAT escluded Shipping to be calculed		

TCF475-000330	2-speed boxed centrifugal aspirators, max flow rate 3000/2007 m ³ /h, V.380/3 BOXED ASPIRATOR with TRANSMISSION CENTRIFUGAL FAN with BELTS and PULLEYS, INOX panels, 2 SPEEDS, max flow rate 3000/2007 m/cubic/hour, revolutions 1500/1004, db 68/58, V.380/3, Kw.0, 81/0,28, Weight 41 Kg, dim.mm.800x600x600h	€ 1.096,56 VAT escluded Shipping to be calculed Delivery from 8 to 15 days		
TCF475-000340	2-speed boxed centrifugal aspirators, max flow rate 3500/2325 m ³ /h, V.380/3 BOXED ASPIRATOR with TRANSMISSION CENTRIFUGAL FAN with BELTS and PULLEYS, INOX panels, 2 SPEEDS, max flow rate 3500/2325 m/cubic/hour, revolutions 1700/1129, db 69/59, V.380/3, Kw.1, 7/0.6, weight 59 kg, dim.mm.800x620x620h	€ 1.168,94 VAT escluded Shipping to be calculed Delivery from 8 to 15 days		
TCF475-000350	2-speed boxed centrifugal aspirators, max flow rate 4000/2657 m²/h, V.380/3 BOXED ASPIRATOR with TRANSMISSION CENTRIFUGAL FAN with BELTS and PULLEYS, INOX panels, 2 SPEEDS, max flow rate 4000/2657 m/cubic/hour, revolutions 1600/1063, db 72/62, V.380/3, Kw.1, 7/0.6, weight 59 kg, dim.mm.800x620x620h	€ 1.168,94 VAT escluded Shipping to be calculed Delivery from 8 to 15 days		
TCF475-000360	2-speed boxed centrifugal aspirators, max flow rate 3500/2342 m ² /h, V.380/3 BOXED ASPIRATOR with TRANSMISSION CENTRIFUGAL FAN with BELTS and PULLEYS, INOX panels, 2 SPEEDS, max flow rate 3500/2342 m/cubic/hour, revolutions 1260/843, db 67/58, V.380/3, Kw.1, 1/0,37, Weight 48 Kg, dim.mm.800x620x620h	€ 1.144,29 VAT escluded Shipping to be calculed Delivery from 8 to 15 days		
TCF475-000370	2-speed boxed centrifugal aspirators, max flow rate 4000/2676 m³/h, V.380/3 BOXED ASPIRATOR with TRANSMISSION CENTRIFUGAL FAN with BELTS and PULLEYS, STAINLESS STEEL panels, 2 SPEEDS, max flow rate 4000/2676 m/cubic/hour, revolutions 1240/830, db 68/58, V.380/3, Kw.1, 1/0,37, Weight 48 Kg, dim.mm.800x620x620h	€ 1.171,29 VAT escluded Shipping to be calculed Delivery from 8 to 15 days		
TCF475-000380	2-speed boxed centrifugal aspirators, max flow rate 4500/2990 m ³ /h, V.380/3 BOXED ASPIRATOR with TRANSMISSION CENTRIFUGAL FAN with BELTS and PULLEYS, INOX panels, 2 SPEEDS, max flow rate 4500/2990 m/cubic/hour, revolutions 1290/857, db 70/59, V.380/3, Kw.1, 7/0.6, weight 60 kg, dim.mm.800x620x620h	€ 1.222,18 VAT escluded Shipping to be calculed Delivery from 8 to 15 days		
TCF475-000410	2-speed boxed centrifugal aspirators, max flow rate 5000/3322 m³/h, V.380/3 BOXED ASPIRATOR with TRANSMISSION CENTRIFUGAL FAN with BELTS and PULLEYS, INOX panels, 2 SPEEDS, max flow rate 5000/3322 m/cubic/hour, revolutions 1040/691, db 66/55, V.380/3, Kw.1, 7/0,6, Weight 86 Kg, dim.mm.900x750x750h	€ 1.316,76 VAT escluded Shipping to be calculed Delivery from 8 to 15 days		
TCF475-000400				

TCF475-000420	2-speed boxed centrifugal aspirators, max flow rate 6000/3986 m²/h, V.380/3 BOXED ASPIRATOR with TRANSMISSION CENTRIFUGAL FAN with BELTS and PULLEYS, INOX panels, 2 SPEEDS, max flow rate 6000/3986 m/cubic/hour, revolutions 1000/664, db 68/58, V.380/3, Kw.1, 7/0,6, Weight 86 Kg, dim.mm.900x750x750h	€ 1.326,13 VAT escluded Shipping to be calculed Delivery from 8 to 15 days			
TCF475-000390	2-speed boxed centrifugal aspirators, max flow rate 5000/3322 m ³ /h, V.230/1 BOXED ASPIRATOR with TRANSMISSION CENTRIFUGAL FAN with BELTS and PULLEYS, INOX panels, 2 SPEEDS, max flow rate 5000/3322 m/cubic/hour, revolutions 1200/797, db 68/62, V.230/1, Kw.1, 7/0,6, Weight 85 Kg, dim.mm.900x750x750h	€ 1.414,32 VAT escluded Shipping to be calculed Delivery from 8 to 15 days			
TCF475-000430	2-speed boxed centrifugal aspirators, max flow rate 7000/4650 m ³ /h, V.380/3 BOXED ASPIRATOR with TRANSMISSION CENTRIFUGAL FAN with BELTS and PULLEYS, STAINLESS STEEL panels, 2 SPEEDS, max flow rate 7000/4650 m/cubic/hour, revolutions 1050/698, db 69/59, V.380/3, Kw.2, 2/0.75, weight 87 kg, dim.mm.900x750x750h	€ 1.546,08 VAT escluded Shipping to be calculed Delivery from 8 to 15 days			
TCF475-000440	2-speed boxed centrifugal aspirators, max flow rate 7000/4650 m²/h, V.380/3 BOXED ASPIRATOR with TRANSMISSION CENTRIFUGAL FAN with BELTS and PULLEYS, INOX panels, 2 SPEEDS, max flow rate 7000/4650 m/cubic/hour, revolutions 1000/664, db 72/59, V.380/3, Kw.2, 2/0,75, Weight 112 Kg, dim.mm.1000x900x900h	€ 1.655,31 VAT escluded Shipping to be calculed Delivery from 8 to 15 days			
TCF475-000480	2-speed boxed centrifugal aspirators, max flow rate 8000/5315 m ³ /h, V.380/3 BOXED ASPIRATOR with TRANSMISSION CENTRIFUGAL FAN with BELTS and PULLEYS, INOX panels, 2 SPEEDS, max flow rate 8000/5315 m/cubic/hour, revolutions 830/551, db 68/55, V.380/3, Kw.2, 2/0.75, weight 113 kg, dim.mm.1000x900x900h	€ 1.665,34 VAT escluded Shipping to be calculed Delivery from 8 to 15 days			
TCF475-000490	2-speed boxed centrifugal aspirators, max flow rate 9000/5979 m ² /h, V.380/3 BOXED ASPIRATOR with TRANSMISSION CENTRIFUGAL FAN with BELTS and PULLEYS, INOX panels, 2 SPEEDS, max flow rate 9000/5979 m/cubic/hour, revolutions 810/538, db 69/59, V.380/3, Kw.2, 2/0.75, weight 113 kg, dim.mm.1000x900x900h	€ 1.666,31 VAT escluded Shipping to be calculed Delivery from 8 to 15 days			
TCF475-000450	2-speed boxed centrifugal aspirators, max flow rate 7000/4715 m ³ /h, V.380/3 BOXED ASPIRATOR with TRANSMISSION CENTRIFUGAL FAN with BELTS and PULLEYS, INOX panels, 2 SPEEDS, max flow rate 7000/4715 m/cubic/hour, revolutions 1140/768, db 74/62, V.380/3, Kw.3, 0/0,9, Weight 113 Kg, dim.mm.1000x900x900h	€ 1.743,90 VAT escluded Shipping to be calculed Delivery from 8 to 15 days			
TCF475-000470	2-speed boxed centrifugal aspirators, max flow rate 8000/5389 m²/h, V.380/3 BOXED ASPIRATOR with TRANSMISSION CENTRIFUGAL FAN with BELTS and PULLEYS, INOX panels, 2 SPEEDS, max flow rate 8000/5389 m/cubic/hour, revolutions 1100/741, db 75/62, V.380/3, Kw.3, 0/0,9, Weight 113 Kg, dim.mm.1000x900x900h	€ 1.738,61 VAT escluded Shipping to be calculed Delivery from 8 to 15 days			

TCF475-000500 2-speed boxed centrifugal aspirators, max flow rate 10000/6736 m²/h, V.380/3 € 1.751,48 BOXED ASPIRATOR with TRANSMISSION CENTRIFUGAL FAN with BELTS and PULLEYS, INOX panels, 2 SPEEDS, max flow rate 10000/6736 m/cubic/hour, revolutions 800/539, db 69/59, V.380/3, Kw.3, 0/,0,9, Weight 114 Delivery from 8 to 15 days TCF475-000550 CF475-000550 € 2.012,14 VAT escluded VAT escluded BOXED ASPIRATOR with TRANSMISSION CENTRIFUGAL FAN with BELTS and PULLEYS, STAINLESS STEEL panels, € 2.012,14 VAT escluded VAT escluded Shipping to be calculed Delivery from 8 to 15 days
2-speed boxed centrifugal aspirators, max flow VAT escluded rate 11000/7410 m²/h, V.380/3 Shipping to be calculed BOXED ASPIRATOR with TRANSMISSION CENTRIFUGAL Pelivery from 8 to 15 days
2 SPEEDS, max flow rate 11000/7410 m/cubic/hour, revolutions 770/519, db 69/59, V.380/3, Kw.3, 0/0,9, Weight 117 Kg, dim.mm.1200x1000x1000h
TCF475-000510Constant2-speed boxed centrifugal aspirators, max flow rate 1000/6736 m³/h, V.380/3 BOXED ASPIRATOR with TRANSMISSION CENTRIFUGAL FAN with BELTS and PULLEYS, STAINLESS STEEL panels, 2 SPEEDS, max flow rate 10000/6736 m/cubic/hour, revolutions 800/539, db 74/62, V.380/3, Kw.3, 0/,0,9, Weight 116 Kg, dim.mm.1200x1000x1000h€ 1.954,87
TCF475-000540€ 2.5peed boxed centrifugal aspirators, max flow rate 12000/8028 m²/h, V.380/3 BOXED ASPIRATOR with TRANSMISSION CENTRIFUGAL FAN with BELTS and PULLEYS, INOX panels, 2 SPEEDS, max flow rate 12000/8028 m/cubic/hour, revolutions 870/582, db 78/66, V.380/3, Kw.4, 2/1,4, Weight 117 Kg, dim.mm.1200x1000x1000h€ 2.221,81 WAT escluded Shipping to be calculed Delivery from 8 to 15 days
TCF475-000530 2-speed boxed centrifugal aspirators, max flow rate 12000/8028 m³/h, V.380/3 € 2.192,30 VAT escluded SoxED ASPIRATOR with TRANSMISSION CENTRIFUGAL FAN with BELTS and PULLEYS, INOX panels, 2 SPEEDS, max flow rate 12000/8028 m/cubic/hour, revolutions 780/522, db 76/64, V.380/3, Kw.4, 2/1,4, Weight 117 Kg, dim.mm.1200x1000x1000h € 2.192,30 VAT escluded
TCF475-000560 2-speed boxed centrifugal aspirators, max flow rate 13000/8757 m³/h, V.380/3 € 2.209,51 WAT escluded Shipping to be calculed BOXED ASPIRATOR with TRANSMISSION CENTRIFUGAL FAN with BELTS and PULLEYS, INOX panels, 2 SPEEDS, max flow rate 13000/8757 m/cubi/hour, revolutions 730/492, db 70/61, V.380/3, Kw.3, 0/0,9, Weight 117 Kg, dim.mm.1200x1000x1000h € 2.209,51
TCF475-000570 2-speed boxed centrifugal aspirators, max flow rate 15000/10034 m ² /h, V.380/3 BOXED ASPIRATOR with TRANSMISSION CENTRIFUGAL FAN with BELTS and PULLEYS, INOX panels, 2 SPEEDS, max flow rate 15000/10034 m/cubic/hour, revolutions 700/468, db 73/64, V.380/3, Kw.4, 2/1,4, Weight 118 Kg, dim.mm.1200x1000x1000h


TCF475-000520



2-speed boxed centrifugal aspirators, max flow rate 10000/6690 m³/h, V.380/3 BOXED ASPIRATOR with TRANSMISSION CENTRIFUGAL FAN with BELTS and PULLEYS, STAINLESS STEEL panels, 2 SPEEDS, max flow rate 10000/6690 m/cubic/hour, revolutions 900/602, db 77/64, V.380/3, Kw.4, 2/1,4, Weight 117 Kg, dim.mm.1200x1000x1000h



Delivery from 8 to 15 days

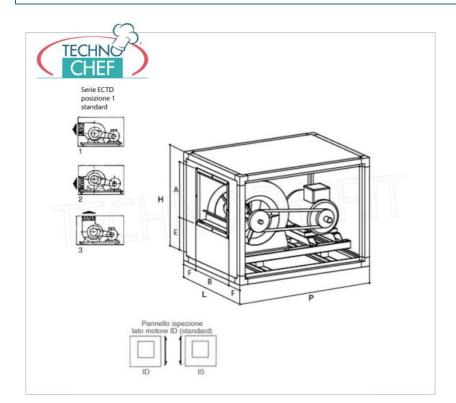

TEC	HNG	1												
C	HEF)												
Modello / Model	milh	HST Hz0	dB	rpm	kW	L	P	н	A	в	E	F	Kg	
ECTD 9/9 A1	max/min 2000/1338	30/14	max/min 62/49	max/min	max/min 0.37/0.12	mm 600	800	mm 600	mm 275	mm 310	748	mm 145	39	
ECTD 9/9 A1	2000/1338	40/18	65/52	1300/870 1440/948	0.55/0.12	600	800	600	275	310	248	145	40	
ECTD 9/9 81	2500/1317	30/15	62/51	1260/830	0.55/0.18	600	800	600	275	310	248	145	40	
ECTD 9/9 B2	2500/1673	40/17	67/52	1450/970	0.81/0.28	600	800	600	275	310	248	145	41	
ECTD 9/9 C1	3000/1975	30/15	63/54	1250/823	0.55/0.18	600	800	600	275	310	248	145	40	
ECTD 9/9 C2	3000/2007	40/21	68/58	1500/1004		600	800	600	275	310	248	145	41	
ECTD 10/8 A1	3500/2325	50/23	69/59	1430/950	1.7/0.6	620	800	620	300	276	258	172	59	
ECTD 10/8 A2	3500/2325	60/30	69/59	1700/1129	1,7/0.6	620	800	620	300	276	258	172	59	
ECTD 10/8 B1	4000/2657	50/24	72/62	1450/963	1.7/0.6	620	800	620	300	276	258	172	59	
ECTD 10/8 B2	4000/2657	60/31	72/62	1600/1063	1,7/0.6	620	800	620	300	276	258	172	59	
ECTD 10/10 A1	3500/2342	30/16	63/53	1060/709	0.81/0.28	620	800	620	300	340	258	140	47	
ECTD 10/10 A2	3500/2342	40/20	67/58	1260/843	1.1/0.37	620	800	620	300	340	258	140	48	
ECTD 10/10 B1	4000/2676	30/15	65/55	1080/723	1,1/0,37	620	800	620	300	340	258	140	48	
ECTD 10/10 B2	4000/2676	40/19	68/58	1240/830	1.1/0.37	620	800	620	300	340	258	140	48	
ECTD 10/10 C1	4500/3011	30/15	68/57	1090/729	1.1/0.37	620	800	620	300	340	258	140	48	
ECTD 10/10 C2	4500/2990	40/20	70/59	1290/857	1.7/0.6	620	800	620	300	340	258	140	60	
ECTD 12/9 A1	5000/3322	50/28	68/62	1200/797	1,7/0.6	750	900	750	355	320	296	215	85	
ECTD 12/9 A2	5000/3322	60/30	68/62	1200/797	1,7/0,6	750	900	750	355	320	296	215	85	
ECTD 12/9 B1	6000/3986	50/26	70/62	1150/764	2.2/0.75	750	900	750	355	320	296	215	86	
ECTD 12/9 B2	6000/3986	60/28	70/62	1150/764	2,2/0,75	750	900	750	355	320	296	215	86	
ECTD 12/12 A1	5000/3345	30/15	62/53	850/569	1,1/0,37	750	900	750	355	410	296	170	84	
ECTD 12/12 A2	5000/3322	40/18	66/55	1040/691	1,7/0,6	750	900	750	355	410	296	170	86	
ECTD 12/12 B1	6000/4014	30/16	65/56	830/555	1,1/0,37	750	900	750	355	410	296	170	84	
ECTD 12/12 B2	6000/3986	40/19	68/58	1000/664	1.7/0.6	750	900	750	355	410	296	170	86	
ECTD 12/12 C1	7000/4683	30/14	67/58	820/549	1.1/0.37	750	900	750	355	410	296	170	84	
ECTD 12/12 C2	7000/4650	40/21	69/59	1050/698	2.2/0.75	750	900	750	355	410	296	170	87	
ECTD 15/11 A1	7000/4650	50/27	72/59	1000/664	2 2/0.75	900	1000	900	414	384	349	258	112	
ECTD 15/11 A2	7000/4715	60/32	74/62	1140/768	3/0.9	900	1000	900	414	384	349	258	113	
ECTD 15/11 B1	8000/5389	50/27	73/61	1000/674	3/0.9	900	1000	900	414	384	349	258	113	
ECTD 15/11 B2	8000/5389	60/32	75/62	1100/741	3/0.9	900	1000	900	414	384	349	258	113	
ECTD 15/15 A1	8000/5315	30/15	63/53	700/465	1.5/0.6	900	1000	900	414	484	349	208	111	
ECTD 15/15 A2	8000/5315	40/18	68/55	830/551	2.2/0.75	900	1000	900	414	484	349	208	113	
ECTD 15/15 B1	9000/5979	30/16	66/56	720/478	1,7/0.6	900	1000	900	414	484	349	208	111	
ECTD 15/15 B2	9000/5979	40/19	69/59	810/538	2.2/0.75	900	1000	900	414	484	349	208	113	
ECTD 15/15 C1	10000/6643	30/17	68/58	700/465	2,2/0,75	900	1000	900	414	484	349	208	113	
ECTD 15/15 C2	10000/6736	40/20	69/59	800/539	3/0.9	900	1000	900	414	484	349	208	114	
ECTD 18/13 A1	10000/6736	50/25	74/62	800/539	3/0,9	1000	1200	1000	492	438	423	281	116	
ECTD 18/13 A2	10000/6690	60/31	77/64	900/602	4,2/1,4	1000	1200	1000	492	438	423	281	117	
ECTD 18/13 B1	12000/8028	50/24	76/64	780/522	4,2/1,4	1000	1200	1000	492	438	423	281	117	
ECTD 18/13 B2	12000/8028	60/30	78/66	870/582	4,2/1,4	1000	1200	1000	492	438	423	281	117	
ECTD 18/18 A1	11000/7308	30/15	67/56	640/425	2,2/0,75	1000	1200	1000	492	570	423	215	111	
ECTD 18/18 A2	11000/7410	40/20	69/59	770/519	3/0,9	1000	1200	1000	492	570	423	215	117	
ECTD 18/18 B1	13000/8636	30/16	68/58	620/412	2,2/0,75	1000	1200	1000	492	570	423	215	116	
ECTD 18/18 B2	13000/8757	40/21	70/61	730/492	3/0,9	1000	1200	1000	492	570	423	215	117	
ECTD 18/18 C1	15000/10104	30/17	72/62	600/404	3/0.9	1000	1200	1000	492	570	423	215	117	
ECTD 18/18 C2	15000/10034	40/22	73/64	700/468	4.2/1.4	1000	1200	1000	492	570	423		118	