

**TECNOSERVICE'21 srl**

by Tinti Sergio  
Via Carlo Pisacane, 134  
61032 Fano (PU) Italy  
P.IVA IT0200411413

Tel. +39 0721 805911  
FAX +39 0721 809794  
e-mail: [staff@technochef.it](mailto:staff@technochef.it)  
[www.technochef.it](http://www.technochef.it)  
[www.technochef.eu](http://www.technochef.eu)

Services and Technologies for professional catering since 1973

**TECHNICAL CARD**

<b>power supply</b>	Monofase
<b>Volts</b>	V 230/1
<b>frequency (Hz)</b>	50
<b>Thermal input (Kw)</b>	21,00
<b>net weight (Kg)</b>	102
<b>gross weight (Kg)</b>	112
<b>breadth (mm)</b>	800
<b>depth (mm)</b>	700
<b>height (mm)</b>	900

**PROFESSIONAL DESCRIPTION****4 BURNERS GAS COOKER on GN 2/1 ELECTRIC OVEN, MACROS 700 line, HIGH POWER series :**


- **worktop** and **front panels** in **AISI 304 stainless steel** ;
- **high power single and double ring burners** guaranteed for life entirely in **nickel-plated cast iron** operated by a valved tap with **safety thermocouple** and **pilot light** ;
- **cast iron grills** ;
- removable trays for maximum hygiene and easy maintenance;
- **80 mm burners entirely in cast iron** , with regulation up to 3.5 kW, and **110 mm** , with regulation up to 7 kW;
- **open fire power n°x kW : 2 x 3.5 kW + 2 x 7 kW** ;
- **static electric oven entirely made of stainless steel** , with **4-level supports for GN grills/trays 2/1** (mm 530x650) ;
- **Grill with salamander function** in the upper part and thermostat that allows accurate **temperature regulation from 50 to 270 °C** ;
- **line indicator** and **temperature indicator** ;
- door and inner door pressed in **AISI 304 stainless steel**;
- high resistance door handle in 20/10 thick **AISI 304 steel** ;
- adjustable feet;
- **2 year warranty** .

**Supplied :**

- 1 anti-tipping oven rack

CE mark  
Made in Italy

CODE	DESCRIPTION	PRICE/DELIVERY
BS-G7F4+FE	GAS COOKER 4 BURNERS on ELECTRIC OVEN GN 2/1, BERTOS, MACROS 700 line, HIGH POWER series, thermal power 21.00 kW + electrical power 7.5 kW, weight 102 kg, dim.mm.800x700x900h	




Macros 700

highpower

	n.	2	2
	Ø mm	80	110
	kW	3,5	7
	kcal/h	3.010	6.020
	Btu/h	11.942	23.884

	GN	2/1
	mm	530 x 650 x 4 pos.
TOT.	kW	7,5 (4,5 + 3)


  

	kW	21
	kcal/h	18.060
TOT.	Btu/h	71.652


	G30/G31	kg/h	1,66
	G20	m³/h	2,22
	G25	m³/h	2,59





Macros 700

highpower

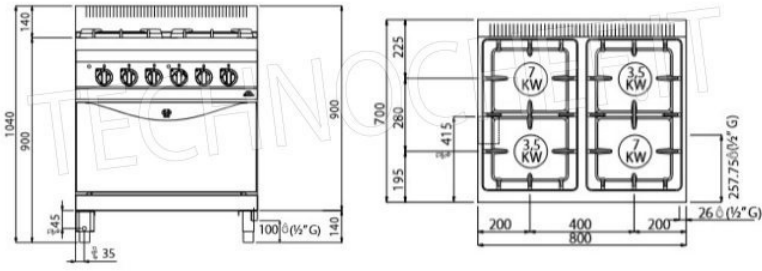


## Macros 700

### HIGH POWER



3,5 kW



7 kW