



PROFESSIONAL DESCRIPTION

Modular prefabricated REFRIGERATOR for temperature -2° +8°C :

- made with **modular sandwich panels** , 70 mm thick, in **non-toxic white pre-painted sheet metal** , insulated with **high density polyurethane** , 40-42 kg/cubic meters (95% closed cells)
- **Panel locking** using eccentric hooks;
- **revolving door with clear light to choose from the following sizes: 600x1850 mm, 700x1850 mm, 800x1850 mm, 900x1850 mm;**
- **easily adjustable door hinges** in 3 directions;
- **handle with lock and safety release from the inside** in phosphorescent material;
- PED **pedestrian flooring** made of **non-slip AISI 304 stainless steel sheet**, STATIC LOAD CAPACITY 1500 Kg/m², POINT LOAD CAPACITY 100 Kg;
- **rounded internal corners** for **maximum hygiene** and **ease of cleaning**,
- prepared for a monoblock **refrigeration unit overlapped on the wall** ,
- on request it is possible to install **ceiling- mounted monoblock units** or **refrigeration units with remote group** ,
- **supplied disassembled and packed on pallets** (on request on wooden crate),
-
- **INTERNAL DIMENSIONS** : mm 1600x1600x2000h.
- **net capacity: 5.12 cubic meters**,
- **EXTERNAL DIMENSIONS:** mm 1740x1740x2140h

Accessories:

- **Internal shelving made of 20 micron anodized aluminum** with 3 rows of grilled shelves.
- **Crawl space for floor ventilation** made of plastic profile.
- **Door curtain made of transparent plastic strips.**
- **Door microswitch and internal light** .

Optional on request:

- **Driveable and reinforced floor**
- **Ceiling refrigeration units**
- Split **refrigeration systems (remote)**
- Possibility of measures other than those proposed.

MONOBLOCK REFRIGERATION UNIT (Not Included) , for Temp. - 2° + 8° C. for OVERLAPPED WALL mounting, V. 230/1 - Kw 1.4 -- mod. TCF313-L07125N

- External bodywork of the monoblock in **galvanized sheet metal**;
- evaporator part frame in magnesium aluminum;
- **max operating ambient temperature +32°C**
- ECOLOGICAL REFRIGERANT **GAS R452a**
- **hermetic compressor**;
- self-resetting high and low pressure switch,
- **automatic hot gas defrosting**,
- **cable** for connecting **the door micro and door light** ,
- **digital telethermometer display** with temperature indication and operating status display: cold-defrosting-evaporator fans-alarm in progress.
- **Temp. Adjustable from: -2° +8° C. ,**
- **possibility of displaying alarms such as:** high and low temperature and pressure, open door, condensation, dirt, etc.
- provision for connection to the frigotel supervisor

CE mark
Made in ITALY

AVAILABLE MODELS

TCF474-TN16-16/S7



Prefabricated cold storage room suitable for normal temperatures (-2°+8°), made of modular sandwich panels, 70 mm thick, with revolving door and floor, 5.12 cubic meters, external dimensions, mm. 1740x1740x2140h

€ 1.503,18

VAT excluded
Shipping to be calculated

Delivery from 15 to 25 days

TCF474-L07125N



Wall-mounted monoblock refrigeration unit TN, tropicalized, for normal temperature -2°+8° ventilated, with ecological gas R404a, V 230/1, Kw 1.4, weight Kg 57, external dimensions mm 1020x520x925h

€ 1.857,50

VAT excluded
Shipping to be calculated

Delivery from 15 to 25 days

TECHNICAL CARD

CODE/PICTURES

TCF474-ILLUMINAZIONE



DESCRIPTION


Door microswitch and internal light

PRICE/DELIVERY

€ 87,12

VAT excluded
Shipping to be calculated

Delivery from 4 to 9 days

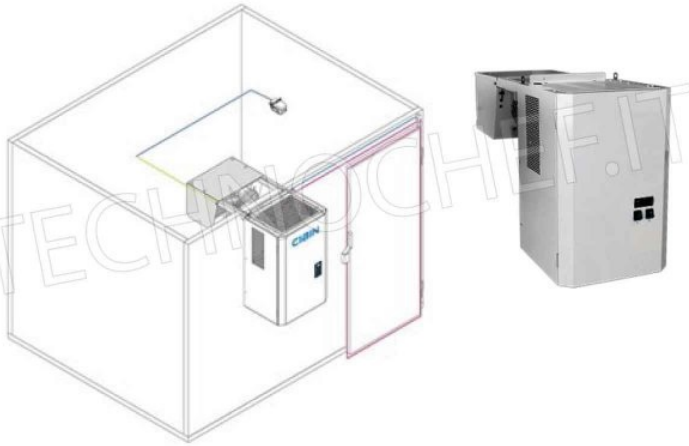




SU RICHIESTA: CELLA SENZA PAVIMENTO



CERNIERE FACILMENTE REGOLABILI IN UTENZA IN 3 DIREZIONI




MANIGLIA STANDARD CON SERRATURA, CHIAVE A SBLOCCO INTERNO DI SICUREZZA

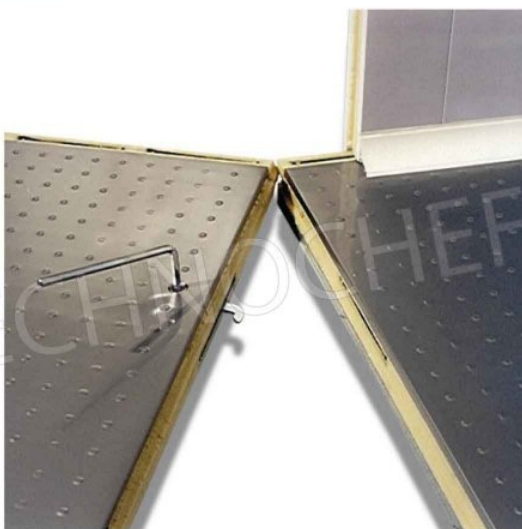

PAVIMENTO STANDARD (NON CARRELLABILE) IN ACCIAIO INOX
ANTISDRUCCIOLO, CON SUPPORTO INTERNO INTEGRATO.



PAVIMENTO + PANNELLO: MONTAGGIO SEMPLICE E VELOCE
TRAMITE FISSAGGIO CON AGGANCIO ECCENTRICO.

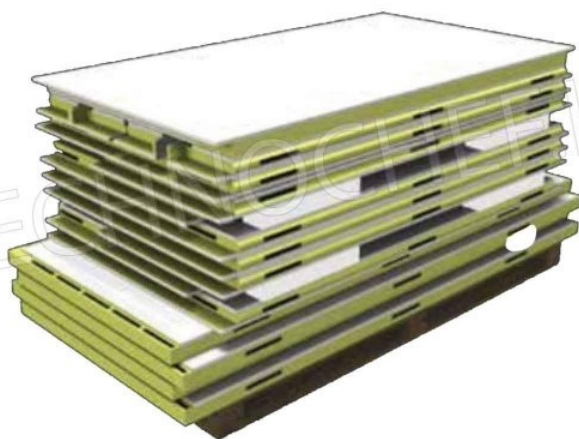

FORNITA SMONTATA E IMBALLATA SU PALLET



SEQUENZA DI MONTAGGIO PANNELLI